

Thimbleberries® Rotary Cutter Case

Sewing Supplies:

Husqvarna Viking Sewing Machine

1/4 yard Thimbleberries Crazy Patch Fabric

Warm and Natural Cotton Batting

Sewing thread

Bobbin thread

40 wt. Rayon Embroidery thread

Rotary Cutter, Board and Ruler

Wrights Home Collection 1 1/2" Tassel

Two beads (the hole must be big enough for the tassel cord to go through)

9" of 1/4" diameter Gold Cord

Husqvarna Viking 1/4" foot



1. Cut one piece of Thimbleberries Crazy Patch fabric 9" x 9".
2. Thread with 40 wt. rayon embroidery thread on top and bobbin thread in the bobbin.
3. Place the 9" x 12" piece of Thimbleberries Crazy Patch right side up on a 9" x 12" piece of Warm and Natural Cotton Batting.
4. Snap on your Transparent B presser foot. Select a decorative stitch. Experiment with different stitches on a scrap of the fabric and batting before you start on your actual piece. To make this project go quickly, avoid intricate cross stitches and dense satin stitches.
5. Stitch decorative stitches along the lines between the fabric patches.
6. Cut your stitched fabric down to 8 1/2" x 8". Press. Using the pattern given, cut two tabs from the stitched scraps.
7. Slide the beads onto the loop of the tassel. Place the loop of the tassel even with the point of the tab and stitch across the point, stitching the tassel loop in place as shown.
8. Place the other tab piece right sides together with the one with the tassel and stitch the sides and point. Leave the straight edge opposite the point open.




9. Trim the corners and turn. Press.

10. To prepare the stitched piece for sewing, mark the tab and cord placement as shown.

11. Place the tab as marked and stitch near the raw edge to hold in place.

12. Place the 9" piece of cord across the piece on the marks and stitch on each edge to hold in place.


13. Cut a lining piece from the remainder of your unstitched patchwork fabric 8 1/2" x 8".

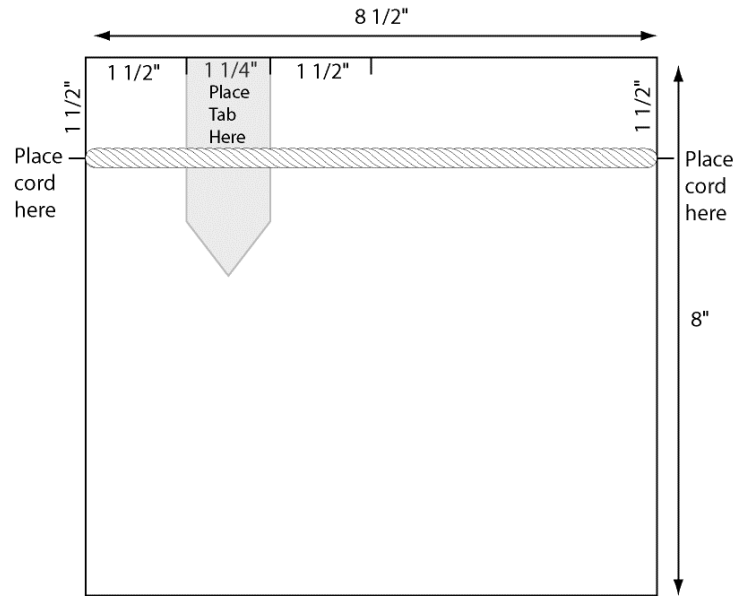

14. Place the lining and stitched outer piece right sides together. Snap on your 1/4" Foot. Stitch using a 1/4" seam allowance around the piece leaving a 3" opening along the edge opposite the tab for turning.

15. Clip the corners and turn.

16. Press and close the opening using Steam-A-Seam 2 or by hand sewing.

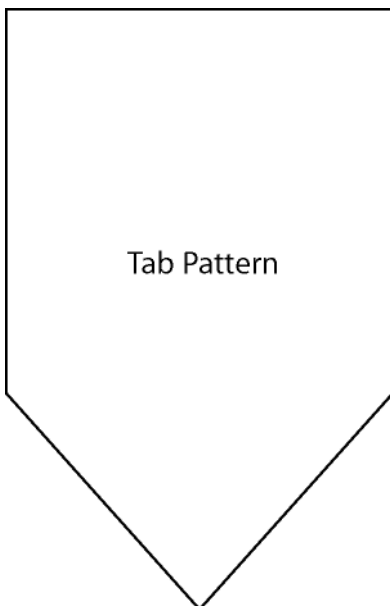

17. Fold the case in half, lining sides together. Pin the side. Fold the tassel tab over the front and insert under the cord. Pin the cord on each side to mark tab "loop" placement so that there is about 1" between the pins.

18. Un-pin the side and open out the case. Select a three step zig zag and drop your feed teeth. Stitch across the cord at the pins to anchor the cord and create a "loop" for the tab.

19. Re-fold and topstitch the side and bottom edges.

20. Insert your rotary cutter and you are ready to go to class!

