

Boys Sweater

Designed & created by Lena Mattsson & Eva-Britt Sundström



Sewing Supplies

- Husqvarna Viking Designer SE
- Red stretch fabric for sweater
- Dark blue stretch fabric for details
- Scraps of four different fabrics and colors
- 40 wt. embroidery thread – red, grey, black and blue
- Regular sewing thread
- Heavy weight sewing thread like Grizzly thread or other topstitching thread

Optional Husqvarna Viking Accessories


- Stretch needle size 75 (411 31 23-01)
- Stretch needle size 90 (411 31 24-01)
- Twin needle size 80, 4 mm (412 03 60-01)
- Husqvarna Viking Large Hoop 9.6" x 6" (240 x 150 mm) (412 52 71-02)
- Husqvarna Viking Tear-Away™ stabilizer ((141 00 05-43)
- Husqvarna Viking Stick-On™ (141 00 05-57)

CUT

Use your favorite sweater pattern and cut out. Do not add any hem at the lower edge or at the sleeves. If hem is included in the pattern, cut it off at the fold line.

Cut a 10" x 12" (25 x 30 cm) piece from the red stretch fabric.

Cut a 1 3/8" (3.5 cm) wide strip from the dark blue stretch fabric for details on sleeves and lower edge.

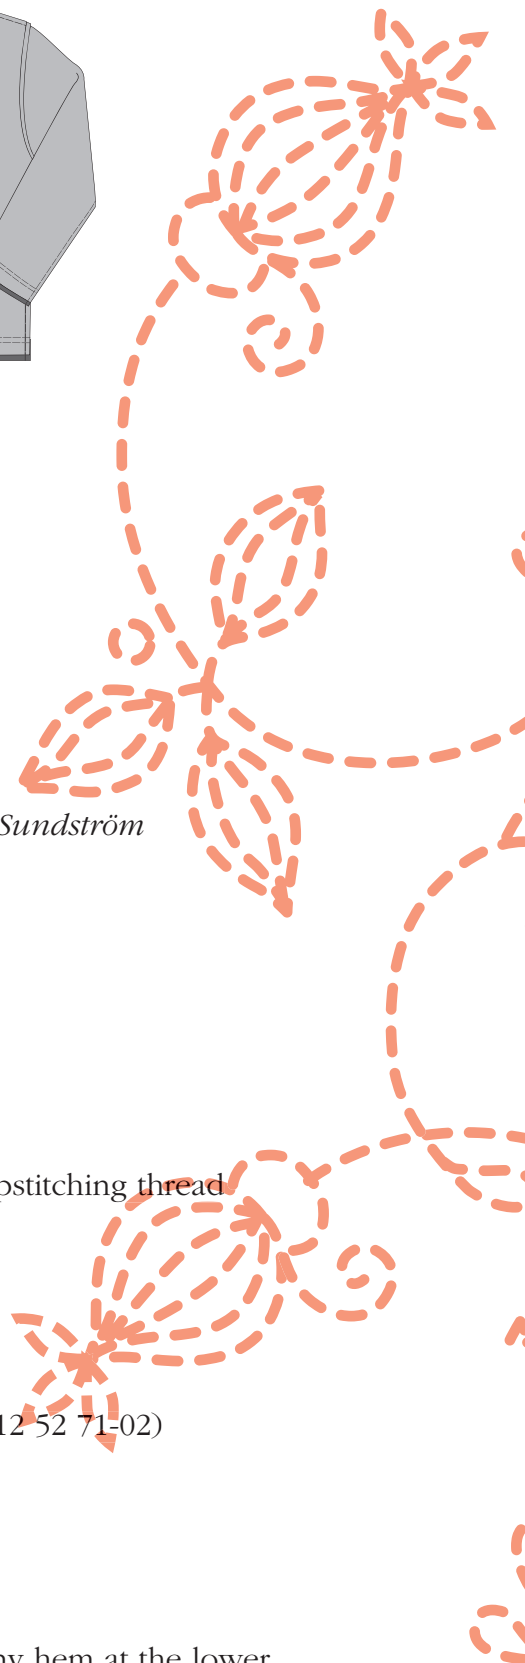

SEW

Pin the scraps of fabric centered on the red fabric piece. Thread your Designer SE with topstitching thread on top and regular sewing thread in the bobbin. Select stretch Medium on your Sewing Advisor. Select reinforced straight stitch and adjust stitch length to 4.0. Insert a stretch needle, size 90 and snap on the Smooth Glide Foot H. Place tear away stabilizer underneath the fabric and sew as illustrated. *Illustration A.*

As decoration on the sleeve, cut a approx. 2 3/8" x 3" (6 x 7 cm) square in red fabric, and a slightly larger square in blue fabric. Pin the blue square with the red on top, on the sleeve. Sew the lower and upper edges.

EMBROIDER

Hoop Stick-On Stabilizer in the large hoop and score the paper with a pin to expose the sticky surface. Place the red fabric piece for the front, centered in the hoop. Insert a stretch needle size 75. Touch the Alphabet menu in Embroidery Mode on your Designer SE and embroider letters in different fonts with embroidery thread, centered on each fabric piece. Tear away the stabilizer and cut down the fabric to 7.5" x 10" (19 x 25 cm).

Illustration B.

Embroider a letter in the square on the sleeve in the same way.

SEW

Place the fabric piece centered on the front piece and mark around with a pictogram pen. Remove the fabric piece and mark 3/8" (1 cm) inside the previous markings. Cut along the inner markings. *Illustration C.*

Pin the embroidered piece covering the hole from the wrong side of the front piece. Toggle to Sewing Mode. Rethread with heavy decorative thread on top and sewing thread in the bobbin. Insert a stretch needle size 90 and select reinforced straight stitch. Use presser foot A. Sew the pinned fabric piece to the front 1/4" (6 mm) from the cut edge. *Illustration D.*

Select Stretch Medium and Seam on your Sewing Advisor. Pin and sew the shoulder seams right sides together. Pin and sew the shoulder seams wrong sides together so the seams are shown on the right side with raw edges. Cut down the seam allowances to 1/4" (6 mm). Insert a twin needle. Rethread with sewing thread on top. Select straight stitch and rethread with sewing thread on top. Pin the right side of the blue strips under the hem and the sleeve edges letting approximate 1/4" (6 mm) show from the right side of the sweater. Stitch 1" (2.5 cm) from the sweater raw edge through all layers. *Illustration E.*




Illustration A




Illustration B

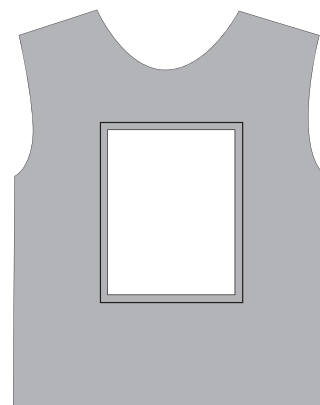


Illustration C



Illustration D

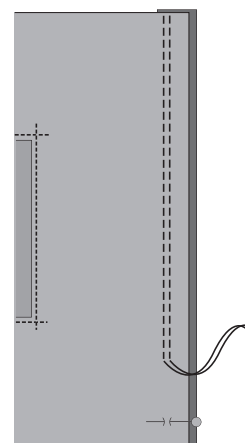


Illustration E



 **Husqvarna**

VIKING