



## Quilted Wall Hanging

By Marie Duncan, Education Creative Coordinator

Create this Quilted Wall Hanging using the techniques used in **DESIGNER DIAMOND™ Special Technique #14 Quilting in Sewing Mode.**

### Sewing Supplies:

- HUSQVARNA VIKING® DESIGNER DIAMOND™ sewing and embroidery machine
- Clear Open Toe Foot 413031945
- Clear B Open Toe Edge/Joining Foot 413058445
- Clearview S Foot 412975145
- Clear ¼" Piecing Foot w/Guide 412927445
- INSPIRA® Tear-A-Way Light stabilizer
- INSPIRA® Topstitch needle, size 90
- Assorted scraps for crazy patch
- ¾ yard multicolor print for borders and backing
- ⅜ yard cream for channel quilt squares
- ⅜ yard tone on tone yellow for stippling strip
- ⅛ yard fabric for binding
- Sewing thread
- Cotton batting
- 40 wt. rayon embroidery thread
- 30 wt. cotton thread
- 12 wt. cotton thread
- Invisible thread
- Bobbin thread
- Pictogram Pen




## Cut:

- Using the pattern pieces given, cut four each of the Crazy patch pieces by placing the pattern piece on the right side of the fabric. Mark the right side of the fabric, and the numbers on each piece.
- Cut two 4½" (11.5cm) squares from cream fabric for channel quilting
- One 4½" (11.5cm) x 12½" (32cm) rectangle from tone on tone yellow for stippling
- Two 2½" (6.5cm) x 12½" (32cm) from multicolor print top and bottom borders
- Two pieces 2½" (6.5cm) x 16½" (41.5cm) from multicolor print for side borders


## Sew:

### Crazy Patch Square:

1. Begin by piecing A to D. Match the sides marked 1, right sides together. Offset the ends by ¼" so the seam line meets as shown.
2. Snap on your ¼" Piecing Foot w/guide. This is a very popular foot because of the flange. You can also use your Quilters ¼" Piecing foot "P".
3. Thread with sewing thread top and bobbin.
4. Sew the first seam.
5. Repeat for pieces B and C matching the sides marked 2.
6. Press the seams open.
7. Place the two pieces together matching the sides marked 3.
8. Stitch the final seam.
9. Trim your square to measure 4½".
10. Repeat for the other three crazy patch squares.
11. Press. Place the pieced squares on INSPIRA® Tear-A-Way Light stabilizer.
12. Insert a size 90 topstitch needle. Thread with 40 wt. rayon embroidery thread, 12 wt. cotton thread or 30 wt. cotton thread on top and bobbin thread in the bobbin.
13. There are several different feet that work well for this stitching over the seam lines. One is the Clear Open Toe Foot. When using this foot, align the red mark at the back of the foot (behind the needle) with the seam. The other is the Clear B Edge/Joining Foot. Both have the "B" bottom with the tunnel to ride over the bulk of the stitching. The Clear B Edge/Joining Foot is not recommended on stitches wider than 7mm. The flange may get caught on the seam when the machine feeds sideways. Use your Clear Open Toe Foot for those stitches wider than 7mm. Try them both and see which you prefer. If the stitch you choose calls for the "S" foot, use Clear View S Foot. It makes it easier to see your seam line.

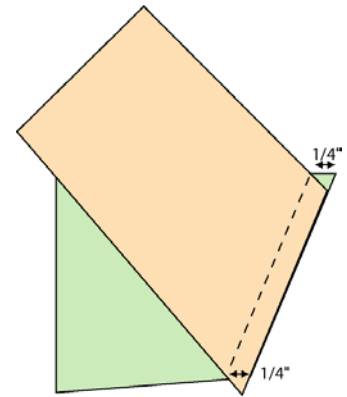




14. Select your favorite quilting stitches from the E Quilting Menu . Stitch the decorative stitches over the seams of the crazy quilt squares.
15. Tear off the stabilizer.


## Piece the Quilt Top:


1. Thread with sewing thread top and bobbin. Snap on your Clear 1/4" Piecing Foot w/ Guide.
2. Place one of the crazy patch squares right sides together with the plain channel quilting square. Stitch a 1/4" seam.
3. Sew another crazy patch square to the opposite side of the plain square.
4. Repeat with the other crazy patch squares and the plain square.
5. Stitch the tone on tone yellow strip for the stippling between the two crazy patch strips.
6. Sew the 2 1/2" (6.5cm) x 12 1/2" (32cm) multicolor print borders to the top and bottom.
7. Sew the 2 1/2" (6.5cm) x 16 1/2" (41.5cm) multicolor borders to the sides.
8. Your quilt top is now pieced.
9. Layer with batting and backing to create a "quilt sandwich".

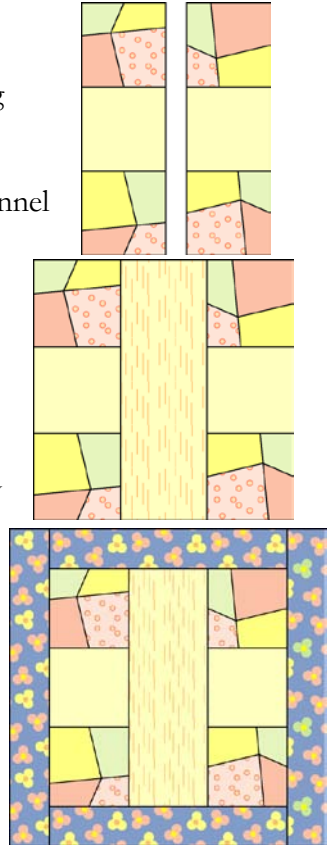


## Stipple Quilting:


Thread with 30 wt. cotton thread top and bobbin. Mark your center stippling piece as shown. Your markings will extend up into the border.

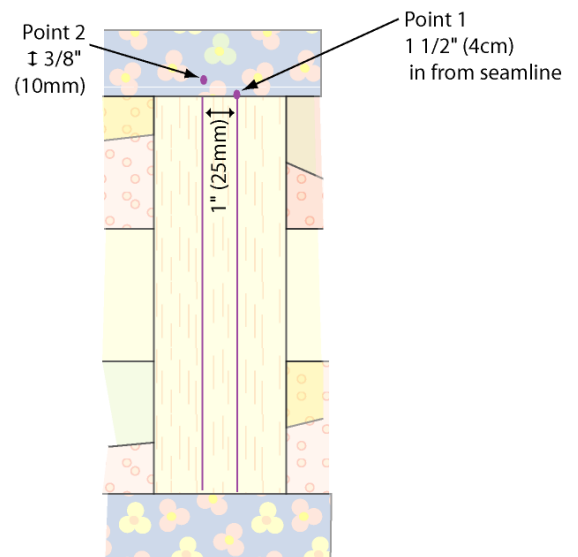






Row 1: Select E2:26 . Insert your needle in the first point. Stitch the first row. Stop, when you reach the bottom border.

Row 2: Touch Pattern Restart . Un-thread your needle. Insert your needle on point 2. Stitch slowly until you reach the edge of the border. Stop, re-thread your needle. Stitch the second row. Will insure that the rows match up. Stop when you reach the bottom border.





## Channel Quilting




1. Snap on your Clear “B” Foot.
2. Thread with 12 wt. thread on top and 30 wt. in the bobbin.
3. Select E1:3 .






4. Insert your Edge/Quilting Guide  1” (25mm) from the needle. To insert the Edge/Quilting Guide, loosen the screw on the back of the ankle. Don’t remove it; just loosen it enough that the quilting guide can be inserted, then tighten it.
5. Align the curved guide of the Guide along the seam of the channel quilting square.
6. Stitch the first row. As you reach the seam line, touch  while the machine is still running, then Selective Thread Cutter .
7. Align the Edge/Quilting Guide with the center of the first row of stitching. Stitch the second row of quilting, and at the end, touch  while the machine is still running, then Selective Thread Cutter .
8. Repeat for row three.
9. Repeat for the other channel quilting square.

## Stitch in the Ditch

1. Touch Start Menu .
2. Touch Set Menu .
3. Touch Sewing Settings .
4. Touch Stitch Width Safety .
5. Attach your Interchangeable Dual Feed Foot with the Stitch in the Ditch Foot.

6. Thread with sewing thread on top and in the bobbin.
7. Stitch in the ditch of the borders.
8. In your SET Menu , touch Stitch Width Safety to remove the .
9. Attach the “A” Foot to your Interchangeable Dual Feed.
10. Thread with 12 wt. Cotton on top and matching 30 wt. in the bobbin. Select E3:58 .
11. Stitch in the ditch on each side of the center strip.

## Handlook Quilt Stitch:

1. Attach the Straight Stitch foot to the Interchangeable Dual Feed.
2. Select E1:2 , Handlook Quilt Stitch.
3. Thread with invisible thread on top and colored sewing or 40 wt. rayon thread in the bobbin. Stand the invisible thread in the upright, vertical position.
4. Test stitch on a scrap with two layers of fabric and batting in between like your wall hanging. Adjust the tension if necessary to bring the bobbin thread to the top.
5. Touch the minus on your **SPEED**   to medium speed. If you sew steadily, at medium speed, it helps your stitches to form better.
6. It often takes a couple of stitches to get the bobbin thread start to coming up. Begin stitching about 1/4” (6mm) on the border before you get to the stippling strip. Those first stitches will be hidden in the multicolor print border. Align the edge of your foot with the edge of the stippling strip and stitch a row of hand look quilting on each side of the stippling.

## Binding:

To bind your quilted wall hanging, go to [www.husqvarnaviking.com](http://www.husqvarnaviking.com), USA, Education, Tips and Hints. Instructions on binding are there.

