



Omnimotion DESIGNER™ Pillow

Make this pillow from scraps in your sewing room and delightful Omnimotion stitches! Stitch out the exercise in the DESIGNER DIAMOND™ Technique Step by Step #25, Omnimotion Stitches.

Sewing Supplies:

- Clear A Feet Set 920237096
- Fancy Trim Foot 412823845
- Clear ¼” Piecing Foot 412927445
- Clear Piping Foot 413097145
- Clear 2-3mm Embellishment Foot 413030445
- Maxi Bead Foot 412701045
- Mini Bead Foot 412701145
- Invisible Zipper Foot 412687045
- INSPIRA® Tear-A-Way stabilizer
- INSPIRA® Twin needle
- 40 wt. rayon embroidery thread
- Bobbin thread
- Sewing thread
- Invisible thread
- ⅜” wide ribbon
- 2 yards of trim
- 1 package jumbo rick rack
- 1 package baby rick rack
- 2-3mm cord for piping
- Piping Hot Binding Tool 140000971
- 14” pillow form
- 12”-14” invisible zipper




Sew:

1. Cut your stitched and embroidered strips ½” from the embroidery on each side and 15” long.
2. The embroidered strips will be nicely centered on the ends. The stitched ones you will have to cut through the stitching. That’s fine.
3. Read through the joining instructions before going any further. That way you can lay out your strips and decide how you would like to join them together. We added some solid strips to make up the needed 15” width and to set off the stitched and embroidered strips.

Join the Strips: Jumbo rick rack:



1. Touch  to toggle to sewing mode.
2. Thread with sewing thread top and bobbin.
3. Snap on your Clear A Edge Joining Foot.
4. Align the edge of the rick rack with the edge of the fabric.

5. Touch  .

6. Touch  .

7. Touch  .

8. Select A1:2  .


9. Stitch the rick rack in place.

10. Place a solid strip right sides together with the stitched strip. With the previous line of stitching up, move the needle position one click to the left. Stitch just to the left of the first line of stitching. Press the rick rack towards the solid strip.

Narrow Ribbon:

1. Touch  .

2. Touch  .

3. Touch .

4. Select A1:2 .

5. Snap on your Clear 1/4" Piecing Foot.

6. Place two strips right sides together and stitch.

7. Press the seam open.

8. Snap on your Fancy Trim Foot.

9. Insert an INSPIRA® size 4.0 Twin needle.

10. Thread with 40 wt. rayon embroidery thread on top (two spools of the same color to match your ribbon) and bobbin thread in the bobbin.

11. Cut a point on one end of the ribbon and thread it into the opening on the Fancy Trim Foot.

12. Place Tear-A-Way stabilizer underneath the seam.

13. Stitch the ribbon in place over the seam.

14. Remove the Twin Needle and replace with a Universal needle, size 80 or desired size.


Piping:

1. Snap on your Clear Piping Foot.

2. Wrap a strip of silk around the 2-3mm piping cord.

3. Touch .

4. Touch .

5. Touch .

6. Select A1:2 .

7. Stitch the piping.

8. Using your Piping Hot Binding Tool, trim the seam allowance to 1/4".


9. Place the piping along the edge of one of the strips.
10. Stitch the piping in place.
11. Place the second strip over the first one, right sides together.
12. Move your needle position one click to the left.
13. Stitch the strips together.

Picot Edge:

1. Fold a 1½” wide x 16” strip of silk in half, lengthwise and press.
2. Snap on your Clear A Edge Joining Foot.
3. Thread with 40 wt. rayon embroidery thread top and bobbin to match the fabric.

4. Touch  .

5. Touch  .

6. Touch  .

7. Select F1:11  .

8. Adjust the stitch width to 4.5.

9. Touch  .

10. Touch the  to move the stitch all the way to the left.


11. Adjust the stitch length to 6.0.

12. Touch Mirror Side to Side  .

13. Align the fold of the strip with the flange in the center of the foot.

14. Stitch. The sideways stitch will fall off the edge of the fabric, forming a picot edge.

15. Using your Piping Hot Binding Tool, trim the seam allowance to ¼”. Let the picot edge ride in the groove as the piping cord does.

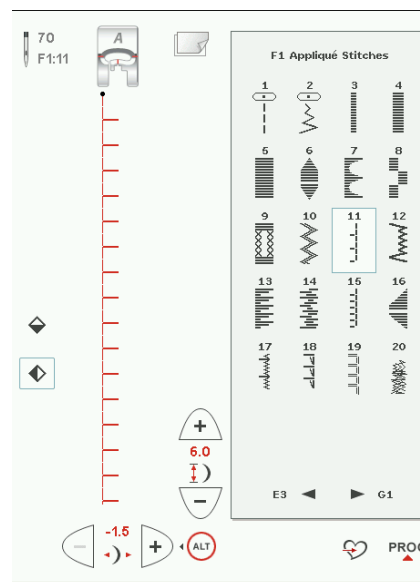

16. Snap on your Clear Piping Foot.

17. Touch .

18. Touch .

19. Touch .

20. Select A1:3 .

21. Adjust the needle position to 2.5 so it is stitching a bit to the right of the picot edge as shown.

22. Place the next strip on top, right sides together.

23. Move the needle position one click to the left.

24. Stitch the strips together.




Baby rick rack:

1. Snap on your Clear 1/4" Piecing Foot.

2. Place two strips right sides together.

3. Touch .

4. Touch .

5. Touch .

6. Select A1:2 .





7. Stitch the strips together.

8. Press the seam open.



9. Snap on your Fancy Trim Foot.

10. Feed the rick rack into the opening and stitch it in place over the seam.

Beads:

1. Snap on your Clear 1/4" Piecing Foot.
2. Place two strips right sides together.
3. Touch  .
4. Touch  .
5. Touch  .
6. Select A1:2  .
7. Stitch the strips together.
8. Press the seam open.
9. There are several beading feet. The Clear 2-3mm Embellishment Foot works well with 2-3mm beads. The Maxi Bead Foot is designed to work with 6mm beads and the Mini Bead with 4mm beads. If you are not sure of the size of your beads, simply slide them in the groove on the underside of the foot. They need to feed freely underneath the foot.
10. Thread with invisible thread on top and sewing thread in the bobbin. Refer to your Accessory User's Guide for the correct stitch to use with the foot you have chosen for your beads.
11. Stitch the beads in place over the seam beginning and ending 1/2" from each end to keep the beads out of the seam allowance.

Finish your Pillow:

1. Join sufficient strips to achieve a 15" square.
2. Trim using your rotary cutter and ruler to even up the square.
3. Cut two back pieces 15" x 8".
4. Snap on your Invisible Zipper Foot.
5. Thread with sewing thread top and bobbin.
6. Touch  .
7. Touch  .

8. Touch .

9. Select A1:2 .

10. Stitch the invisible zipper between the two back pieces.

11. Open the zipper part way.

12. Place the two back pieces right sides together. Stitch all the way around the pillow.

13. Turn through the zipper.

14. Place your trim along the edge of the pillow overlapping by about ¼”.

15. Touch .

16. Touch .

17. Touch .

18. Select A1:11 .

19. Stitch the trim in place, mitering the corners.

20. If desired, hand sew an additional strip of trim over the stitching on the back of the pillow to give a nice, professional finish to the pillow back.