

Chefs Apron with Towel



Sewing Supplies

- Husqvarna Viking Viva Sewing machine
- Linen fabric metrics for 2 1/2 yd (2 1/2 meters) , of linen fabric width
- 40 wt. Embroidery Thread
- Sewing thread to match the fabric
- Pictogram pen (412 08 38-48)
- Tear Away™ Stabilizer (141 00 05-43)

Optional:

Edge/Joining Foot (412 28 02-45)

(Read about optional accessories in the Husqvarna Viking Accessory User's Guide.)

Seam allowances are included in all measurements below.

Cut

1 piece for the apron, 24" x 30" (60 x 75 cm)

1 piece for the tie band, 2 1/2" x 88" (6 x 225 cm)

1 piece for the pocket, 8 1/2" x 14" (21 x 35 cm)

1 piece for the towel, 13" x 24" (33 x 60 cm)

SEW

Apron: Turn under a double 3/8" (1 cm) hem on all edges. Press. Thread with matching sewing thread on top and in the bobbin. Select stitch 00, the straight stitch. Snap on presser foot A or the optional Edge/Joining Foot, that guides topstitching perfectly. (If you are using the optional foot you have to adjust the needle position to the right.) Sew the hem.

Select stitch 04, the three step zigzag and overcast the tie band and the pocket.

Rethread your sewing machine with embroidery thread on top. Snap on presser foot B. Select decorative stitch 13. Place tear away stabilizer underneath the fabric, stitch in the center of the tie band lengthwise and across the towel 3.5" (9 cm) from the lower edge. Select stitch 11, the satin stitch and adjust stitch length to 0.3 and stitch width to 2.0. Sew on both sides of the decorative stitch on the tie band and the towel. Let the side of the presser foot run along the edge of the decorative stitch for an even distance between the seams. Tear away the stabilizer.

Illustration A

Rethread with sewing thread on top again and snap on presser foot A. Select straight stitch. Fold the tie band in thirds, lengthwise. Press. Stitch three rows, one in the center of the decorative stitch and one on the inner side of each satin stitch as illustrated. Select zigzag again and adjust the stitch length to 1.0, stitch the short ends. Attach the tie band to the apron with straight stitch 3" (8 cm) from the upper edge.

Illustration B

Pocket: Draw the letters on a piece of paper and pin it to the pocket. Snap on presser foot A and stitch along the outer lines of the letters. Tear away the paper. Rethread with embroidery thread on top. Select stitch 01, the reinforced straight stitch. Place tear away underneath the fabric and stitch on top of the ordinary straight stitch. Tear away stabilizer.

Illustration C

Turn under a 1 1/2" (4 cm) hem at the upper edge of the pocket. Press. Rethread with sewing thread on top. Straight stitch 1 1/4" (3 cm) down from the edge. Turn under a 3/8" (1 cm) hem on the remaining edges. Press. Snap on presser foot D or the optional Edge/Joining Foot. Adjust the needle all the way to the left. Pin the pocket to the apron and topstitch it in place.

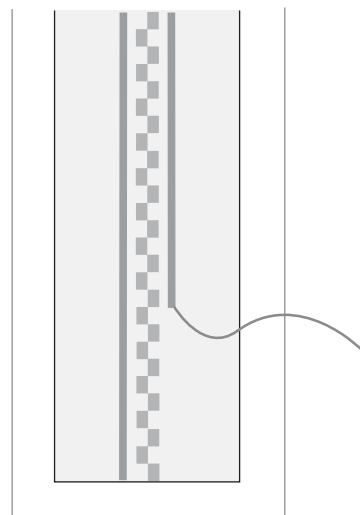


Illustration A.

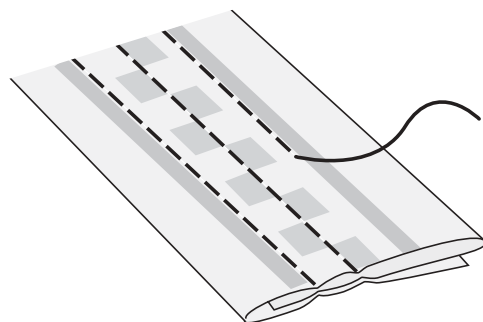


Illustration B.



Illustration C.



 **Husqvarna**

VIKING