

Belt

Designed & created by Lena Mattsson & Karin Larsson



Sewing Supplies

- Husqvarna Viking Designer SE
- Red cotton fabric
- Volume Vlieseline™ or light weight fusible batting
- Sewing thread
- Buckle
- Needle for hand stitching

Optional Husqvarna Viking Accessories

- Pictogram Pen (412 08 38-48)

CUT

Measure your waist. Triple that measurement and add 8" (20 cm).

Cut out a strip that length and the width of the buckle, from fabric and Volume Vlieseline™ or light weight fusible batting, adding 5/8" (1 cm) seam allowance on all sides.

Press the Volume Vlieseline™ or light weight fusible batting on to the wrong side of the fabric strip.

SEW

With a Pictogram Pen, mark lines every 7/8" (2 cm), starting 6" - 8" (15 - 20 cm) from one short end and 1.5" (4 cm) from the opposite short end. Fold at the markings as illustrated and press.

Illustration A.

7/8" (2 cm)


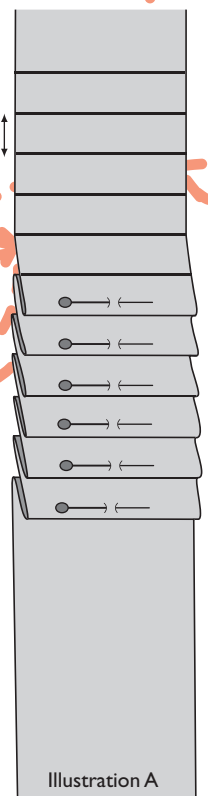


Illustration A

Cont.


Thread your Designer SE with sewing thread on top and in the bobbin. Select Woven heavy and Seam on your Sewing Advisor. Snap on presser foot B. To secure the pleats, sew a centered seam from one short end to the other across the pleats.

Illustration B.

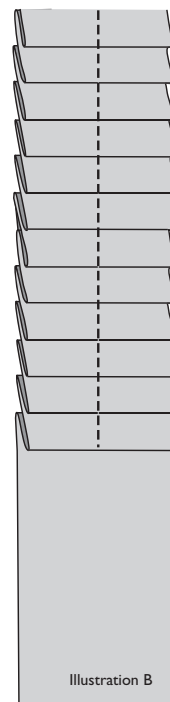


Cut out a backing piece in the red fabric using the pleated top piece as your pattern. Pin the top and back pieces right sides together and straight stitch all around leaving one short side open for turning.

Illustration C.

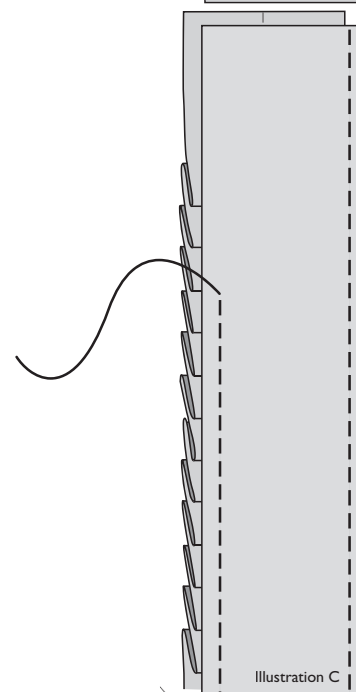

Trim the seam allowances and turn right side out. Press. Tuck in the seam allowance in the open short end and press. Topstitch the opening closed. Insert the buckle and fold back the short end and slipstitch by hand in place.

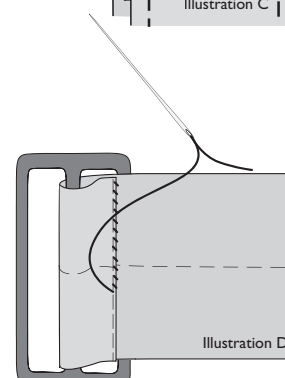

 **Husqvarna**

VIKING