

Callas



Sewing Supplies

- Husqvarna Viking Sewing Machine
- Husqvarna Viking Huskylock Machine
- Scrap of green cotton fabric
- Scrap of white thai silk fabric
- Batting
- 15 3/4" (40 cm) Steel wire
- 10" (25 cm) fishing line. (rather stiff)
- 1 q-tip
- Stretch lace
- Sewing thread
- Fasturn (412 55 08-01)

CUT


Cut the pieces for stem and petal according to the illustrated measurements. 1/4" (6 mm) seam allowance included in all measurements.

SEW

Stem: Snap on presser foot A. Select straight stitch. Fold the green piece for the stem lengthwise, right sides together and stitch the side and the shorter edge.

Slide the fabric tube onto the Fasturn Tube. Insert the turning wire and twist to the right through the fabric edge. Place the batting at the top of the tube, making sure the batting feeds into the tube as you pull the fabric through the tube.

Fold and tape the the steelwire ends and place the steelwire into the stem to stabilize it. Put the stem aside. (illustration 1).

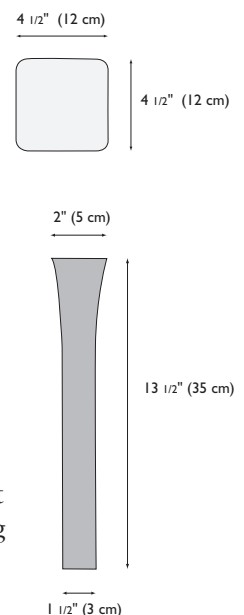

Petal: Select the 3-thread rolled edge stitch on your Huskylock. Place the edge of the white square underneath presser foot and lower the foot. Insert the fishing line between the needle and the upper blade and stitch all around the square. Let the fishing line be stitched into the rolled edge for stability.

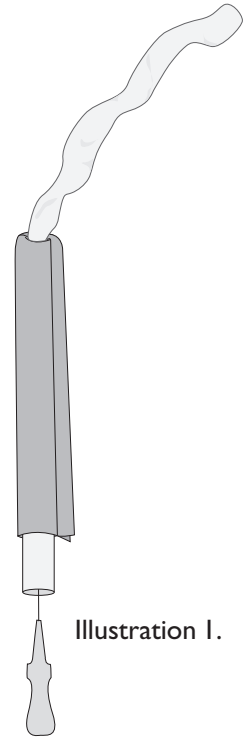


Illustration 1.

Pistil: Form a pistil by wrapping a little fiberfill and small piece of beautiful lace fabric or lace trim around the end of a q-tip. Hand stitch in place. (illustration 2).

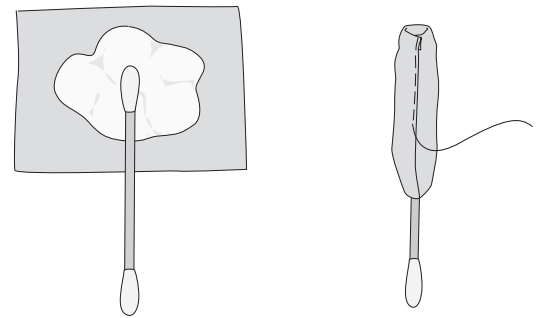


Illustration 2.

Fold and roll the corner of the square to form a calla petal and insert into the green stem with a little batting to fill the stem near the flower. Insert the pistil. (illustration 3).

Handstitch in place.

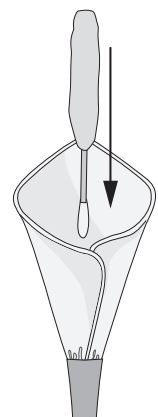


Illustration 3.



Husqvarna

VIKING