


## Soft Case for Sewing Machine and Embroidery Unit

Designed & Created by Kerstin Alriksgård



Download the pattern for the Soft case on our web site [www.husqvarnaviking.com](http://www.husqvarnaviking.com)

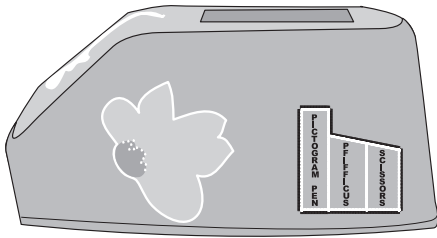

### Sewing Supplies

- Husqvarna Viking Sewing/Embroidery machine
- Heavy cotton fabric – see pattern instructions for amount
- Fabric for appliqués
- Cotton lining 40" (1 m)
- Batting 50" (1.30 m)
- Sewing thread, 2 spools
- 40 wt.embroidery thread, 1 spool
- Steam-A-Seam/fusible web 10" (25 cm)

### Husqvarna Viking Accessories

- Open Toe Foot (412 27 70-45)
- Open Toe Stippling Foot (412 53 10-45, 412 61 34-45 or 412 80 10-45 depending on which sewing machine you have)
- Embroidery needle (412 40 22-01)
- Universal needle (411 31 04-01)
- Pictogram Pen (412 08 38-48)
- Needle for hand sewing

You find these and many other accessories in the Husqvarna Viking Accessory User's Guide or on our web site [www.husqvarnaviking.com](http://www.husqvarnaviking.com), for purchase at your nearest Husqvarna Viking Dealer.

5/8" (1.5 cm) seam allowance included in pattern.


### Cut

Download the pattern and cut out. Place the pattern pieces on the fabric and cut out. Cut the lining in the same way. Cut the appliqués in a suitable fabric and add 3/8" (1 cm) seam allowance. Cut Steam-A-Seam/fusible web 3/8" (1 cm) smaller than the appliqué.

Press Steam-A-Seam/fusible web on the wrong side of the appliques and press them onto the fabric. Cut a piece of fabric large enough to hoop in your large hoop.


### Embroider

Slide on the embroidery unit and insert an embroidery needle. Thread with embroidery thread on top and bobbin thread in the bobbin. Hoop the pocket fabric with Tear-A-Way™ stabilizer underneath. Select a font from your machine, Disk, d-Card or 3D Embroidery Software Program. To place the letters vertical, you need to use 3D Studio. Otherwise place the letters one at a time. Embroider the words. When finished tear away the stabilizer.

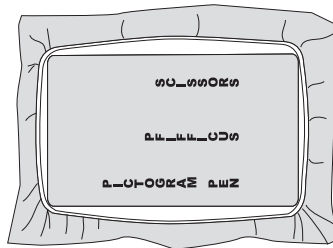


### Sew

Remove the embroidery unit and insert a Universal needle size 80. Rethread your sewing machine with sewing thread on top and in the bobbin. Snap on the Open Toe Foot and select a satin stitch. Sew the appliqués onto the fabric 3/8" (1 cm) from the edge. Fringe and trim the edges.

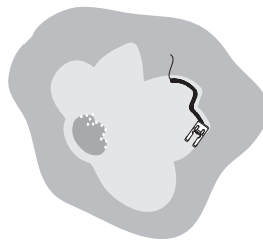

Sew with the same close zigzag stitch over the lines. Cut out the pocket from the pattern. Fringe the edges. Sew the pocket onto the fabric with a straight stitch, leave the upper edge open.

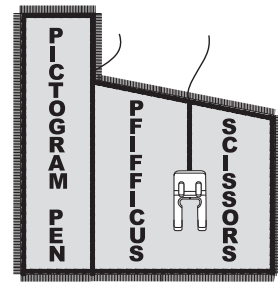





Put all pattern pieces on the batting and cut out. Snap on the Open Toe Stippling Foot and quilt all pieces with stippling, except for the appliqués and the pocket. Snap on presser foot A. Put the fabric and the lining right sides together and sew around the handle with a straight stitch. Turn right side out. Pin the Soft Case together and sew. Repeat with the lining. Press. Turn under the hem at the lower edge 5/8" (1.5 cm) and press. Sew with a straight stitch. Sew the lining onto the Soft Case by hand.


8 1/2" (21.5 cm)


# SEWING MACHINE COVER

Fabric amount:  
40" x 56" (1 x 1.40 m)  
18" x 56" (0.45 x 1.40 m)

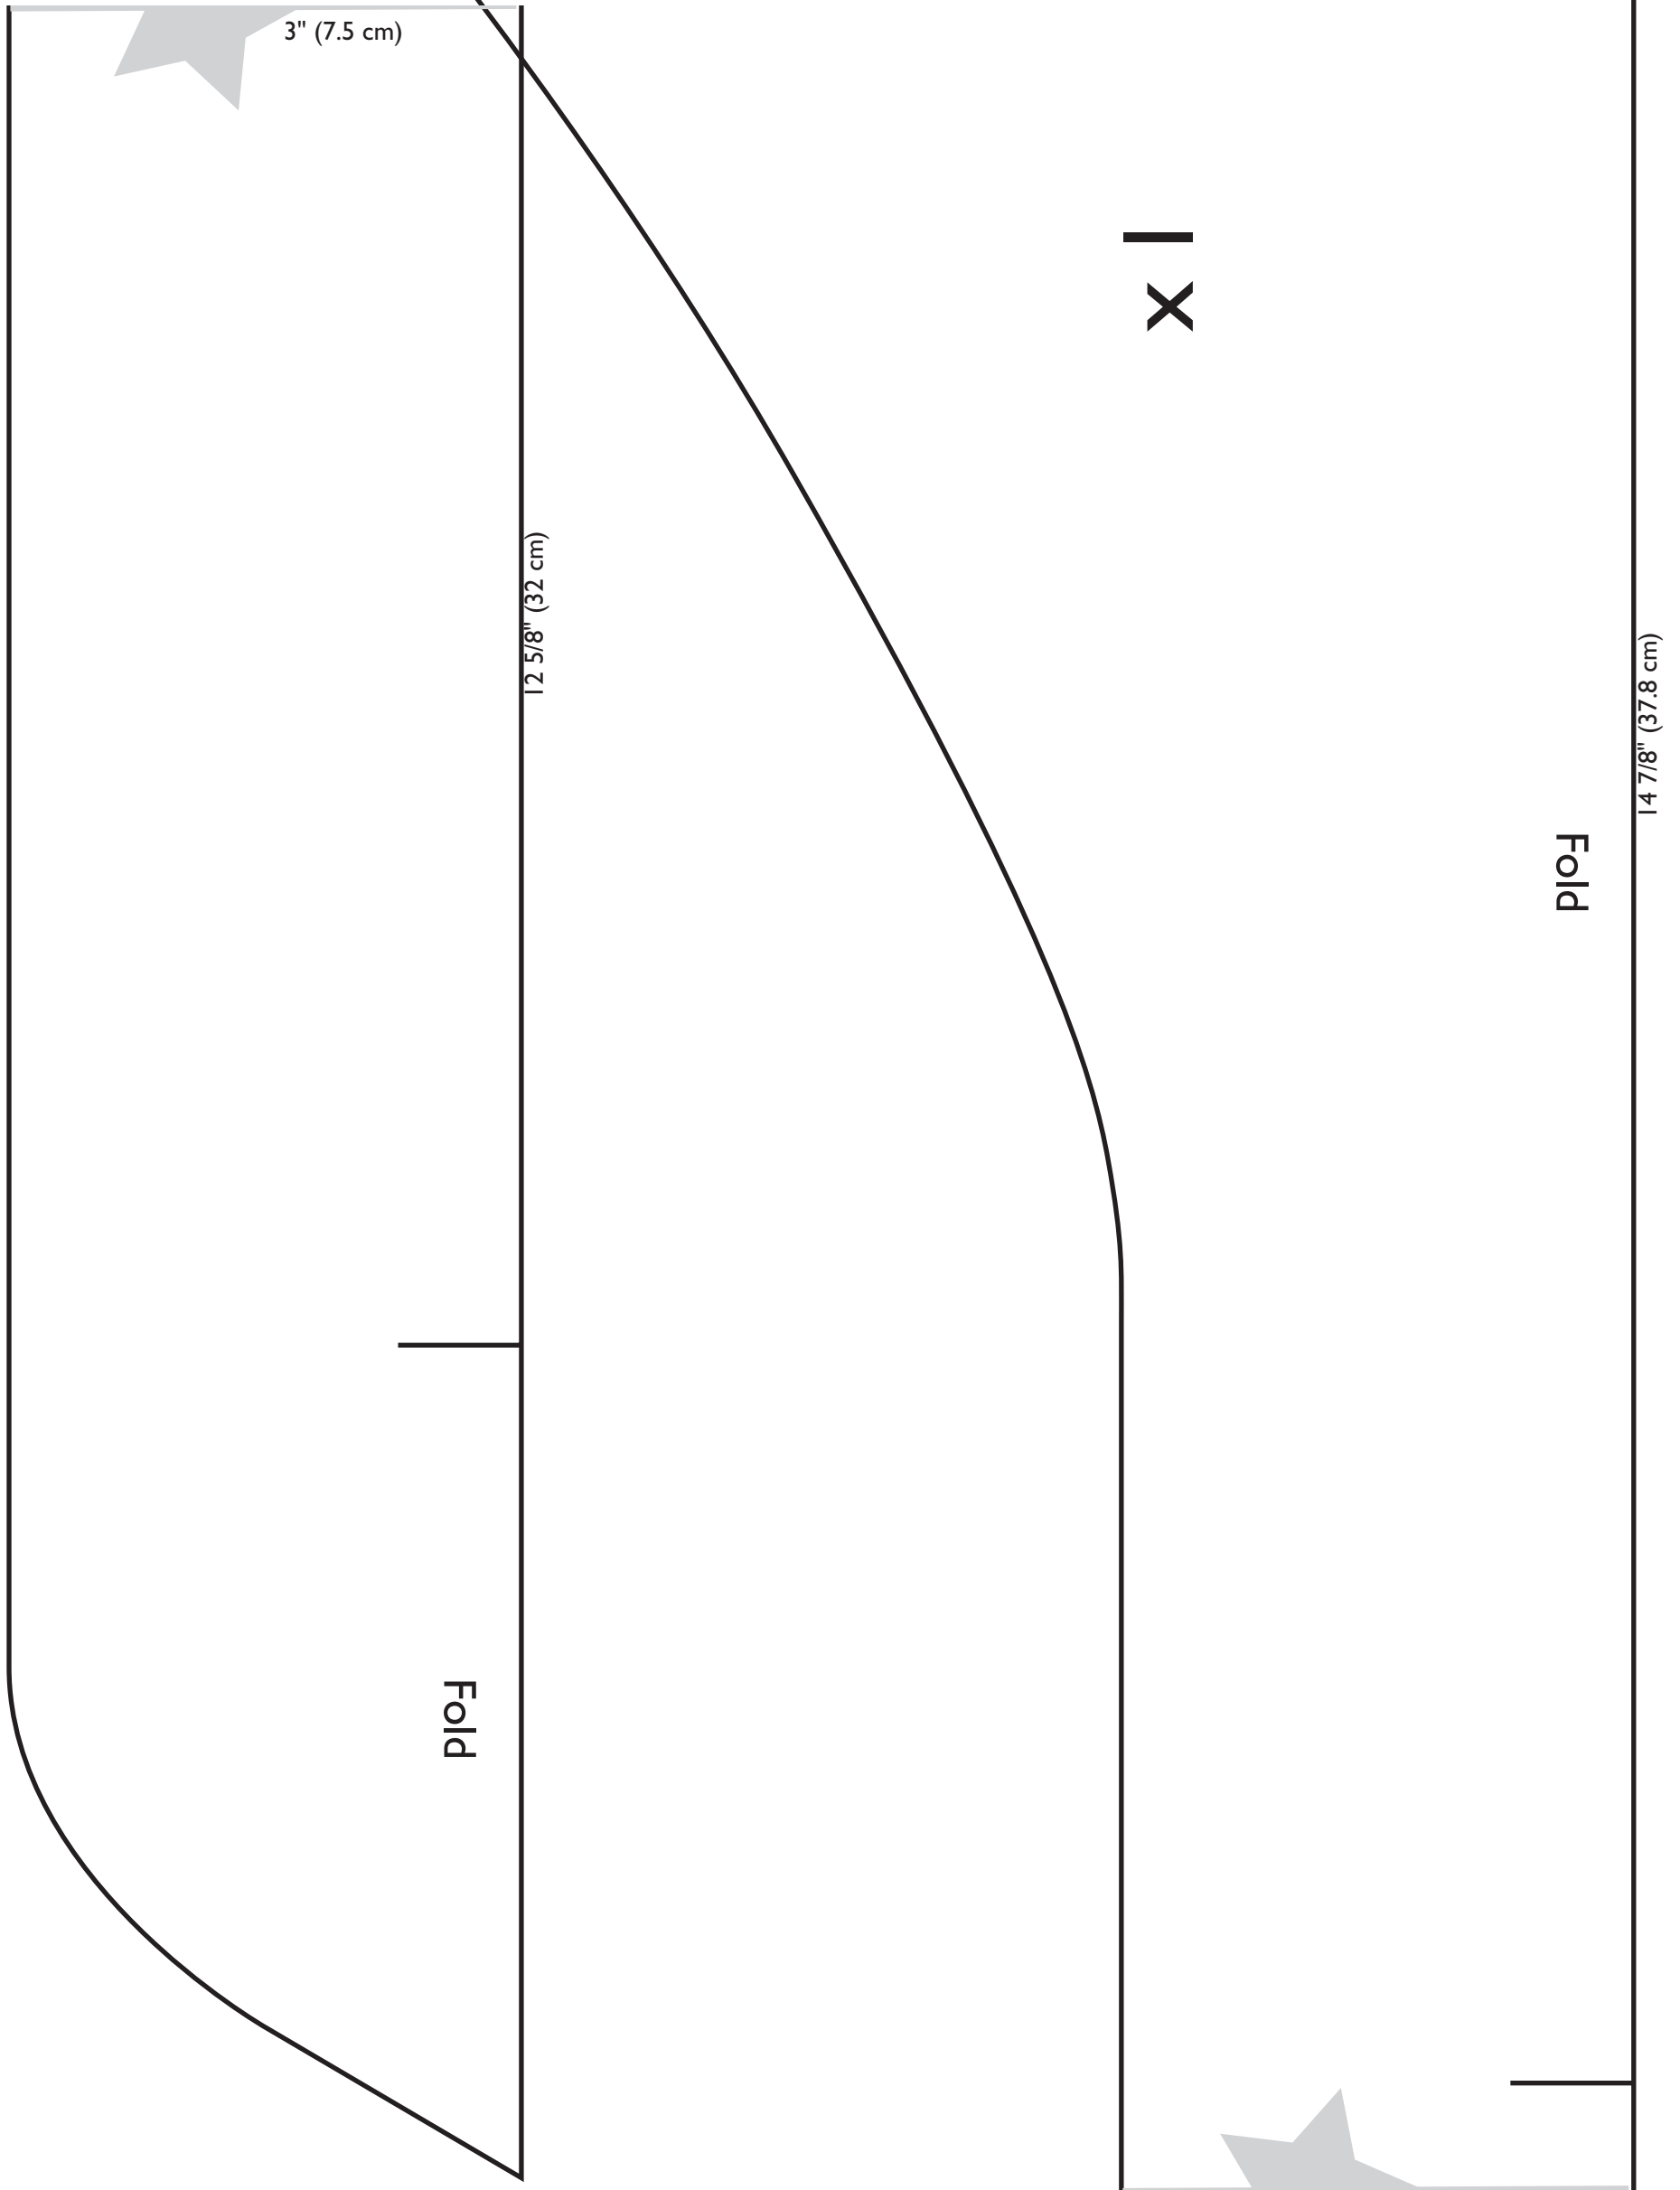

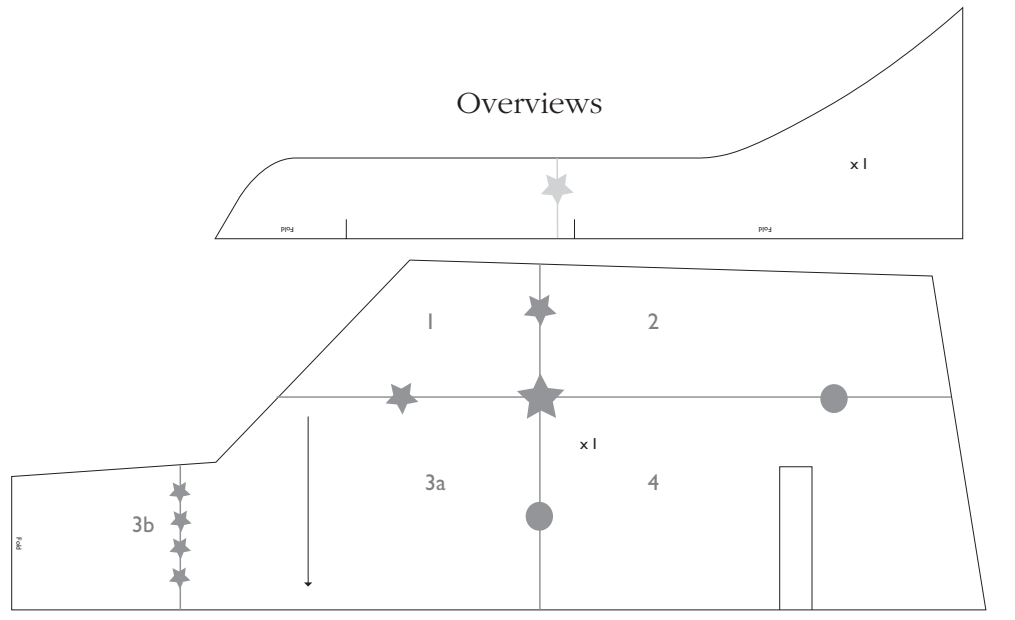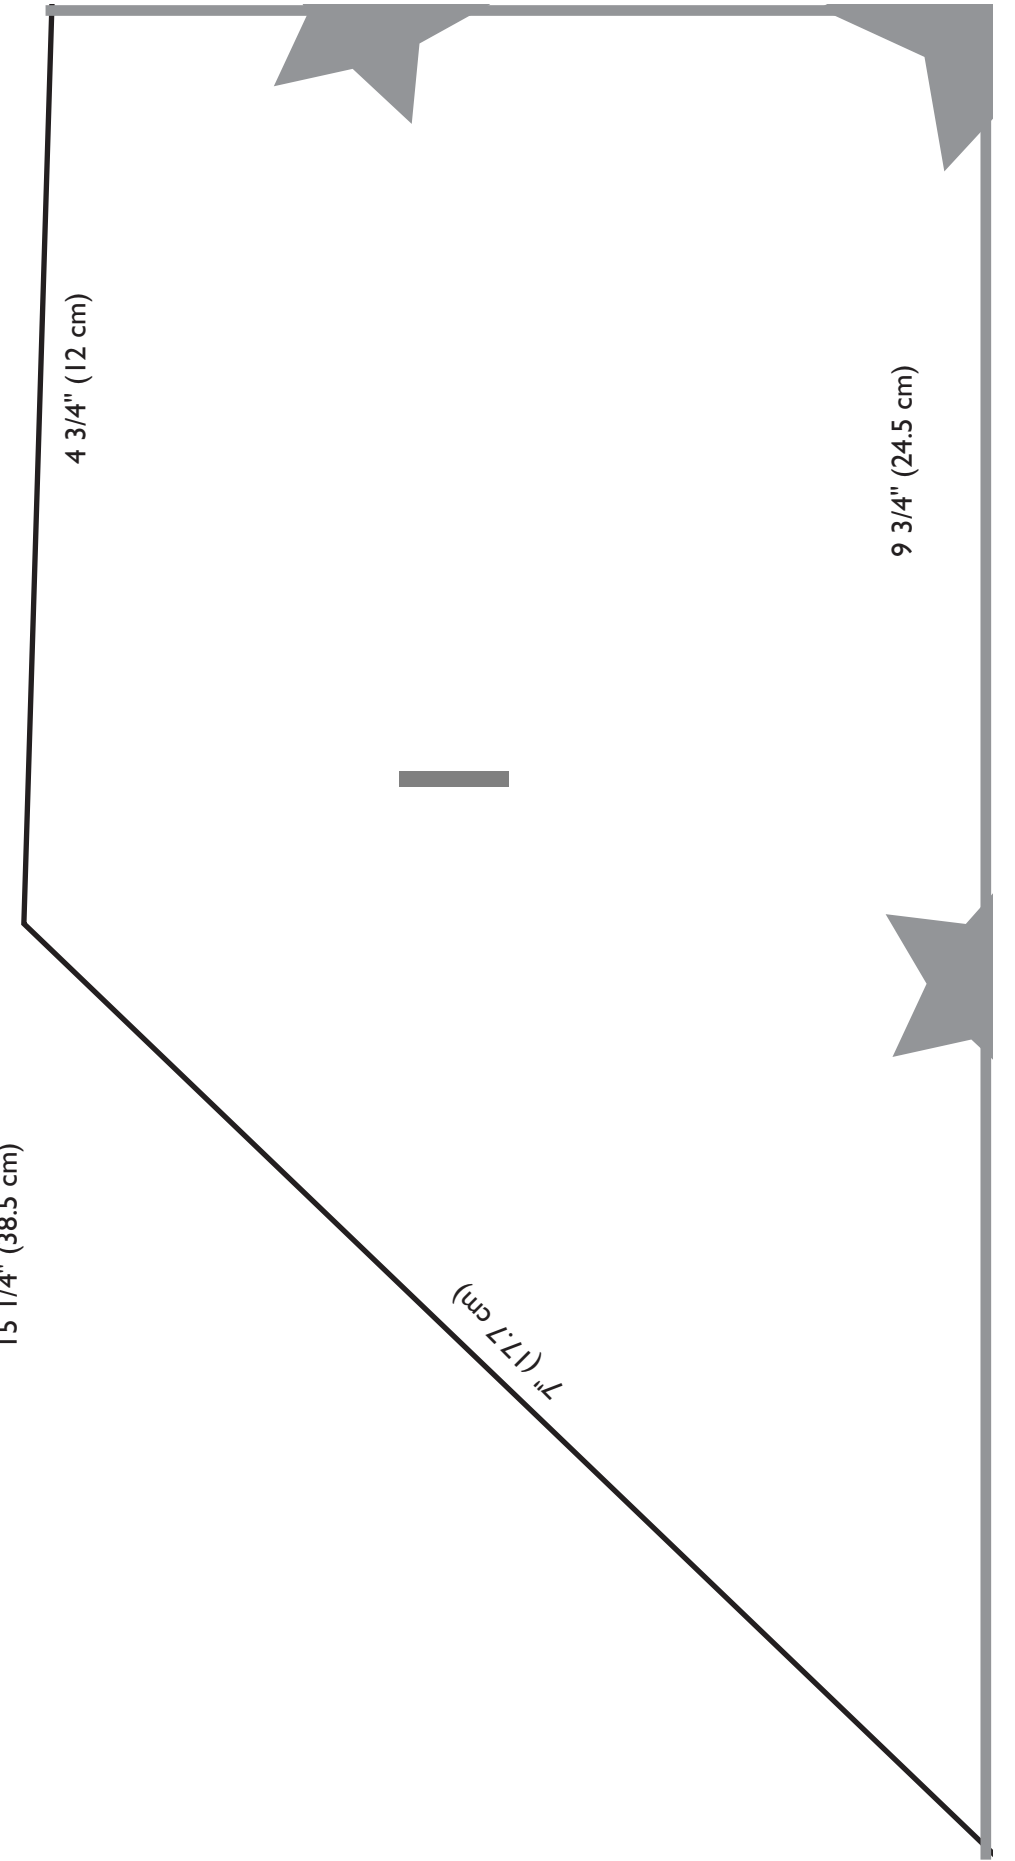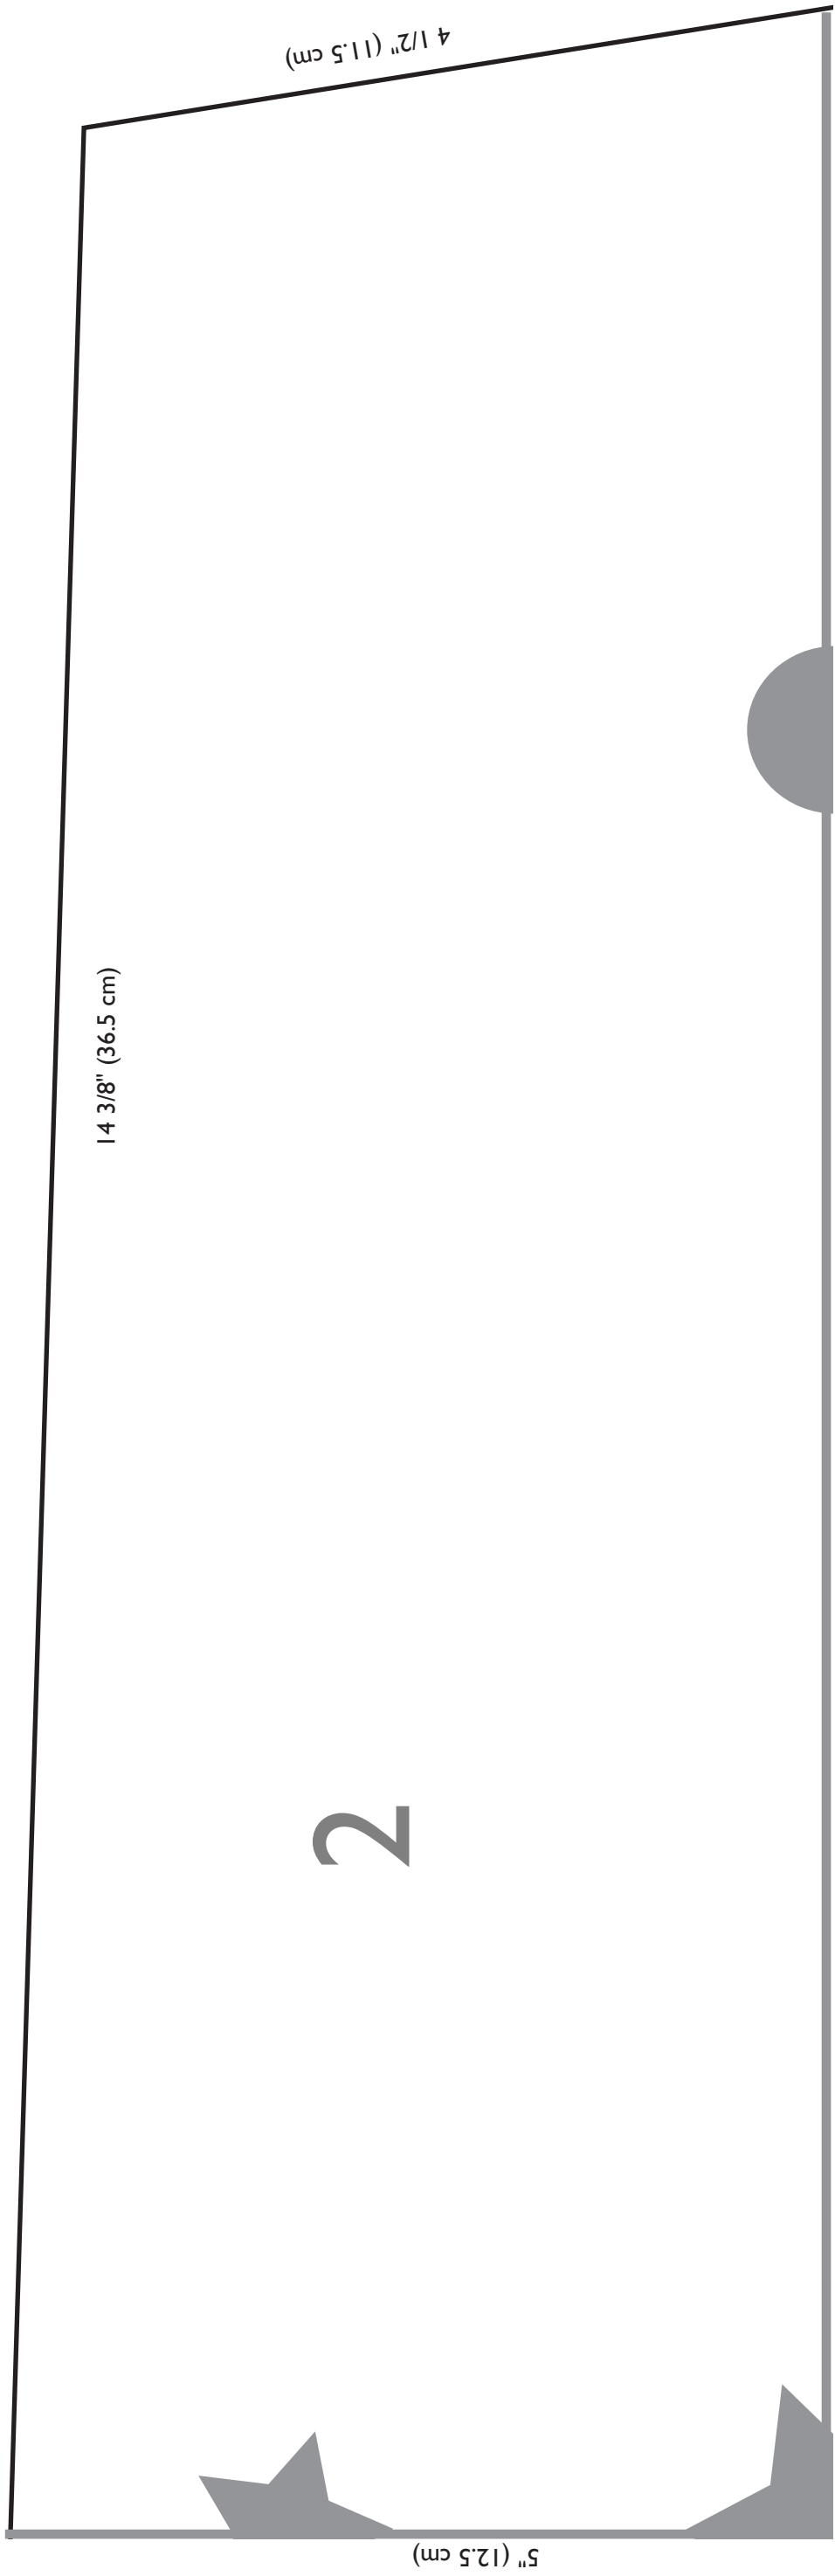

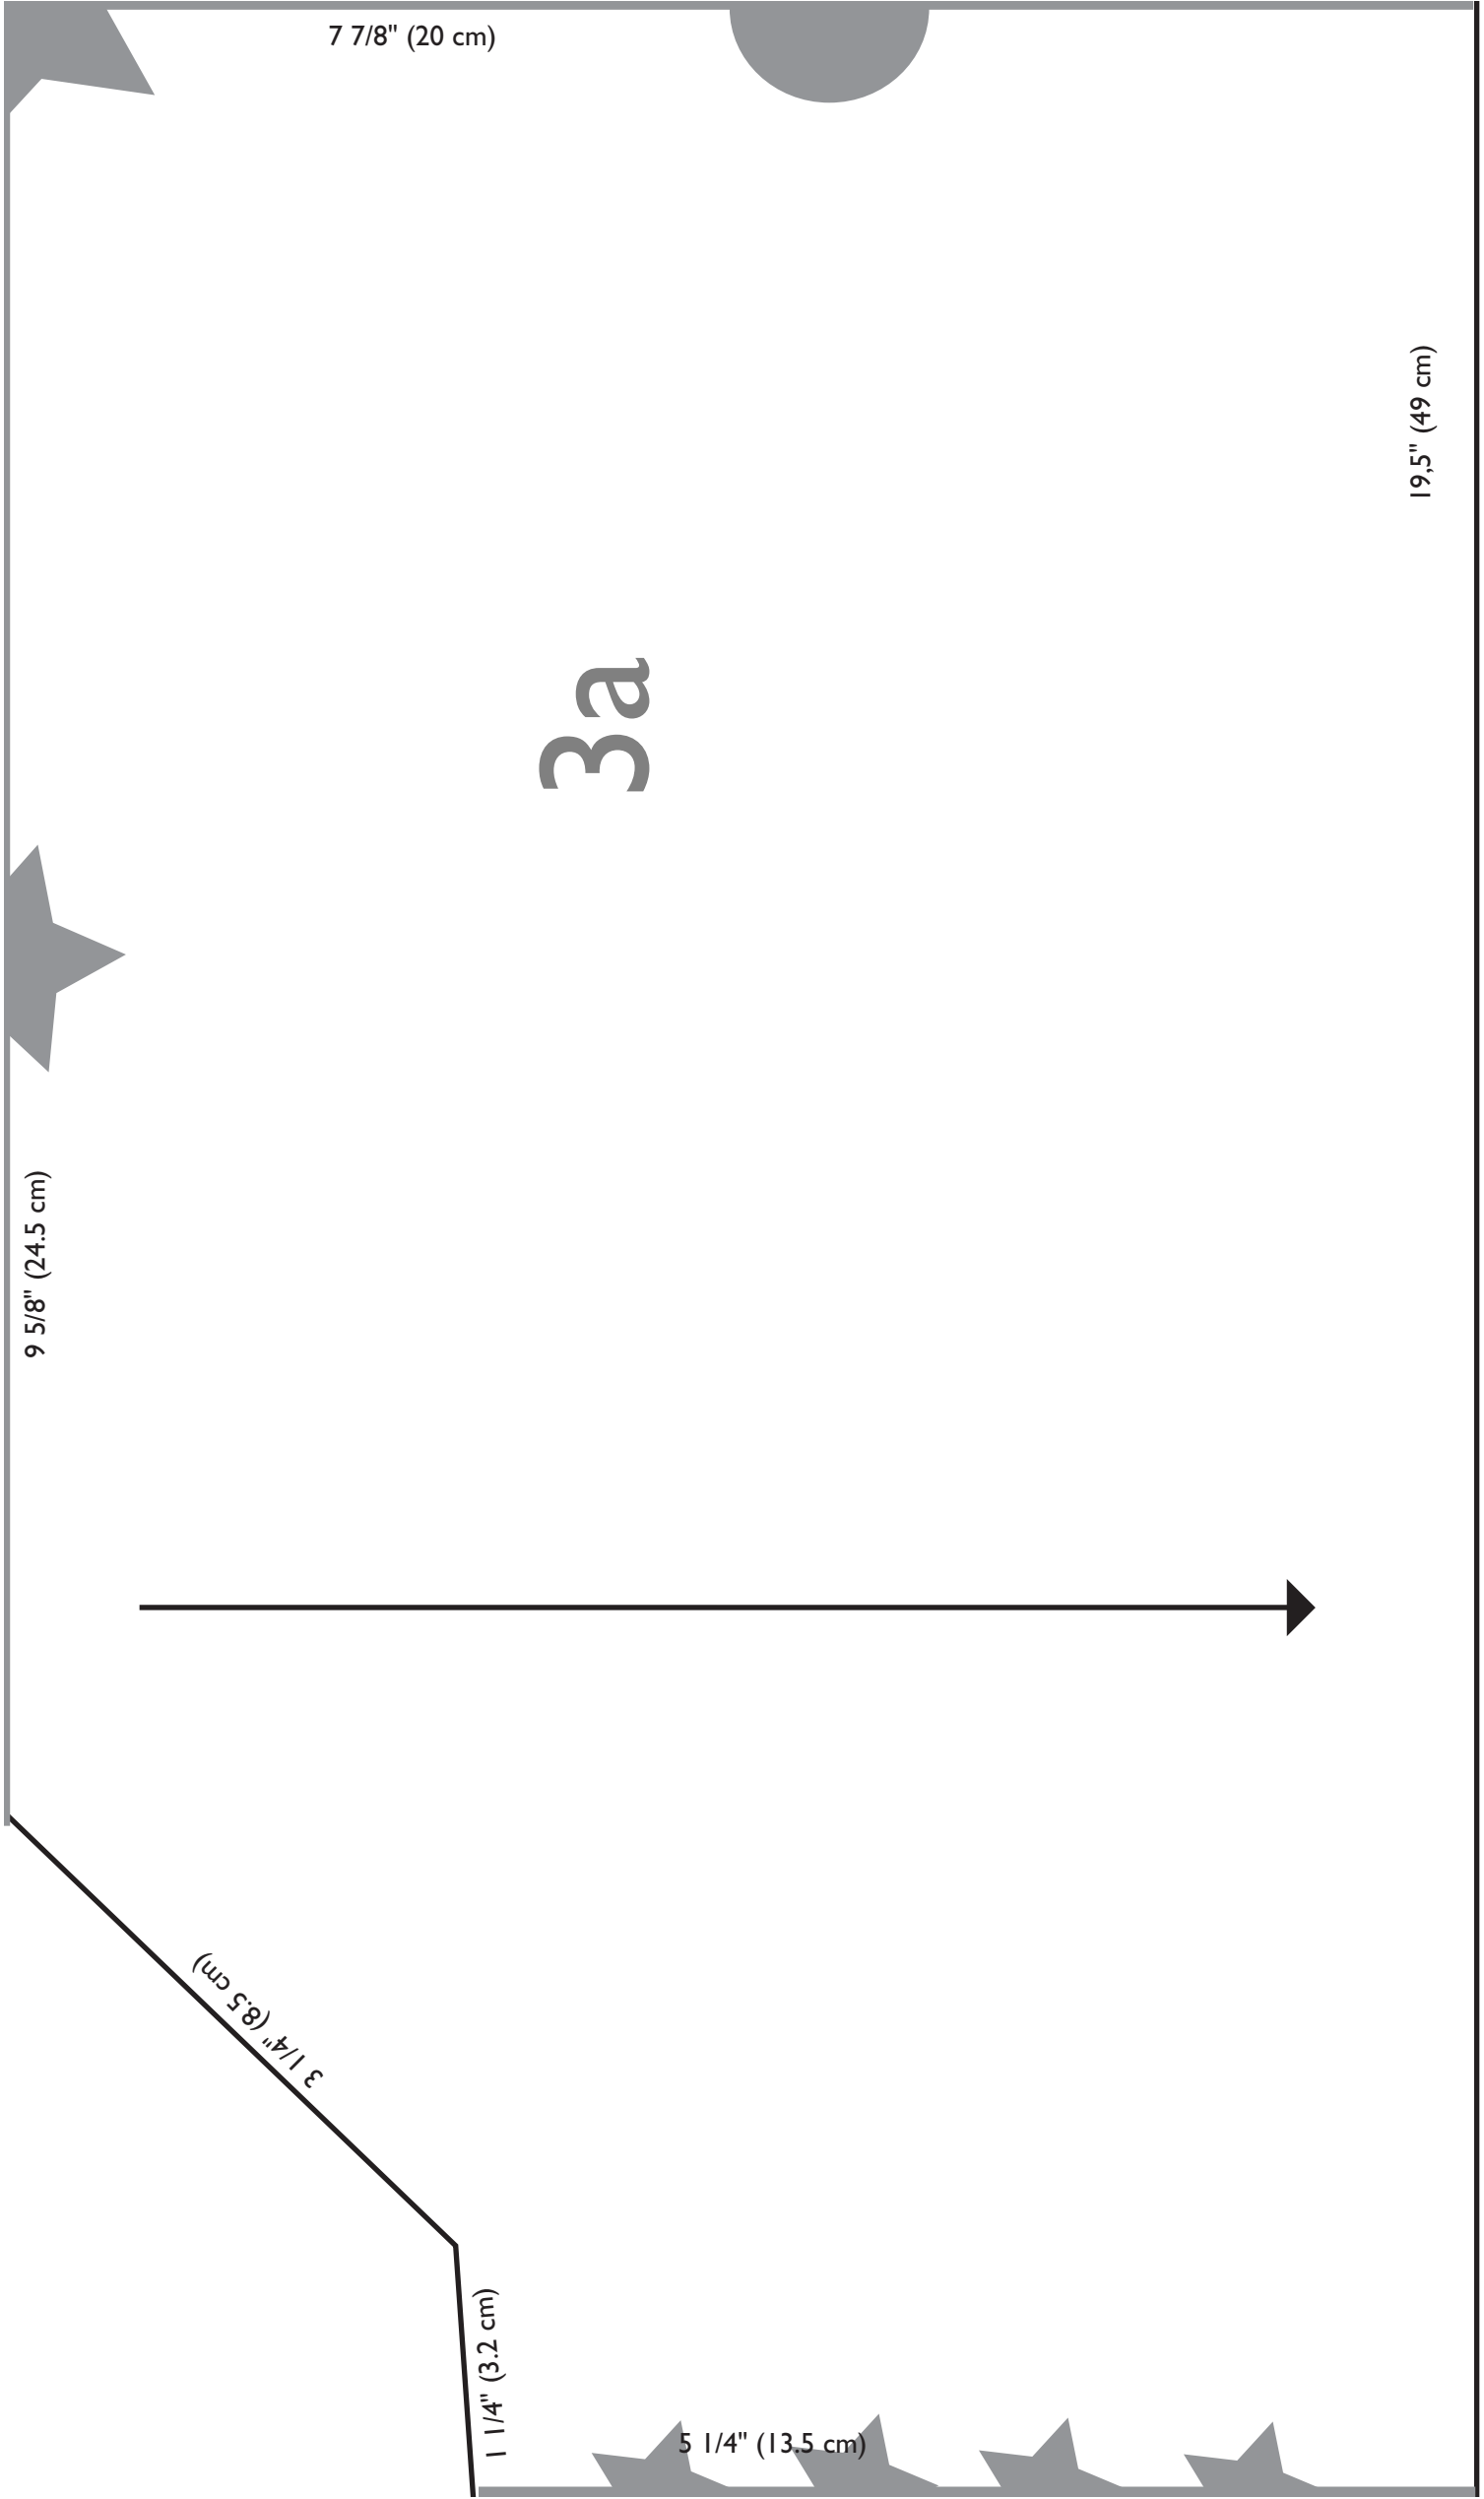

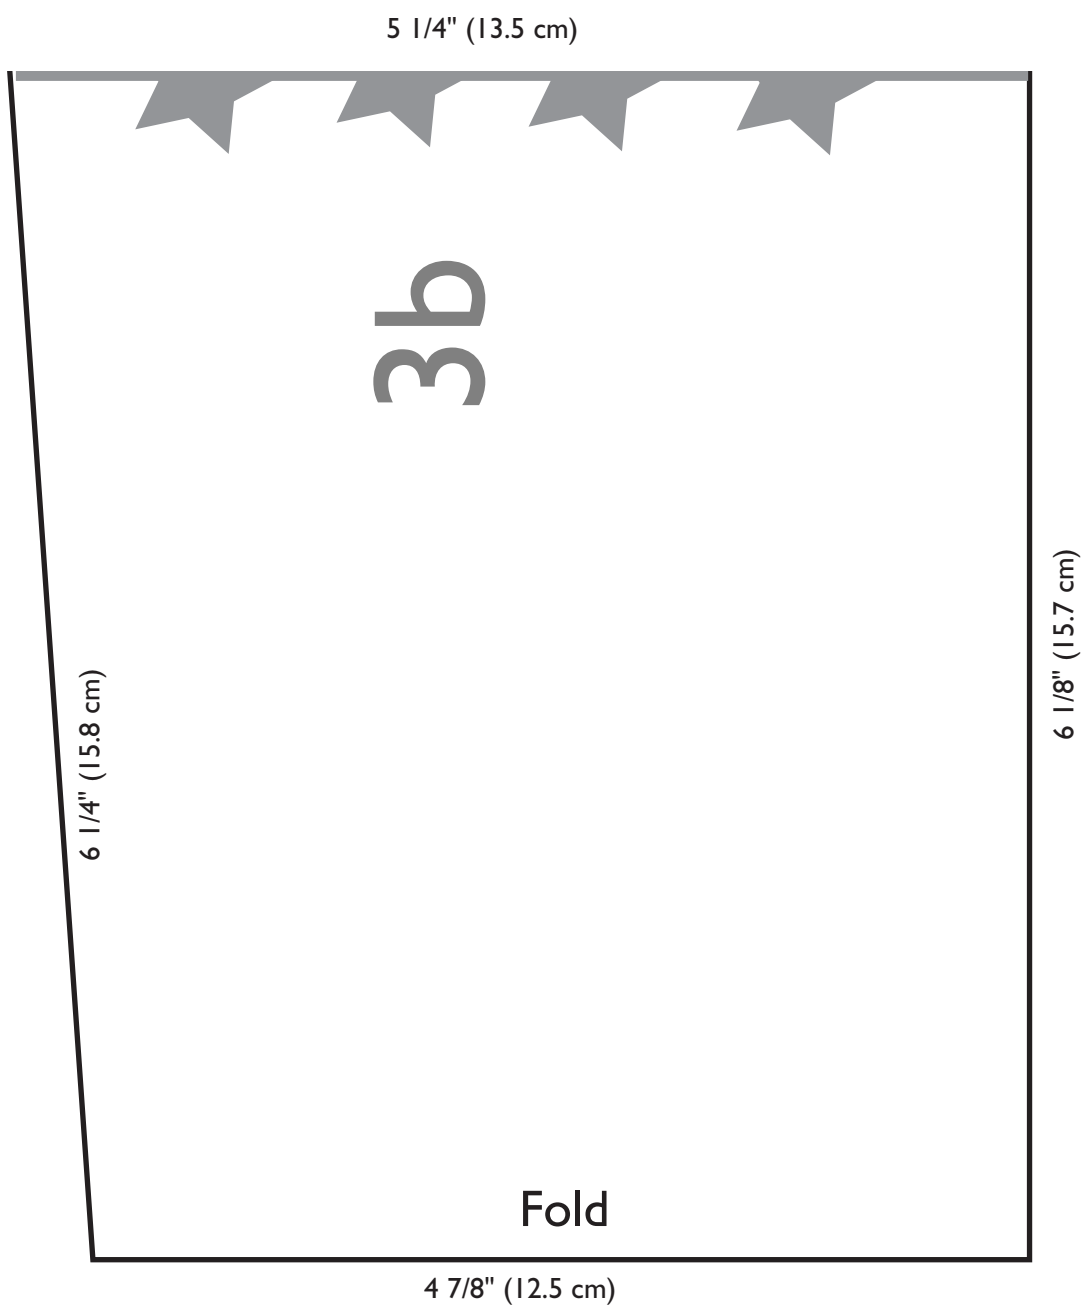

15 1/4" (38.5 cm)

7 7/8" (20 cm)

5 1/4" (13.4 cm)

1 1/4" (3 cm)

5 1/4" (13.4 cm)

16 3/8" (41.5 cm)

XI

4

7 7/8" (20 cm)

