

Kings Cape

Designed and Created by Tinneke Pot

This fun and easy cape is sized for a child about 5 years old.



Sewing Supplies

- Husqvarna Viking Sewing machine
- 1 yd (90 cm) of red plush fabric, at least 43 3/8" (110 cm) wide
- 3/8" yd (60 cm) of white fleece fabric on 59" (150 cm) width
- Scraps of black felt fabric for dots
- Sewing thread, red, white and black
- 19" (48 cm) of 3/4" (2 cm) wide elastic
- 1 buckle
- 1 safety pin
- 1 needle for hand sewing

Husqvarna Viking Accessories

- Edge Stitching Foot (412 40 77-45)

You can find these and many other accessories in the Husqvarna Viking Accessory User's Guide or on our website www.husqvarnaviking.com, for purchase at your nearest Husqvarna Viking Dealer.

3/8" (1 cm) seam allowance included in all measurements.

CUT

From the red plush fabric:

One piece 43 3/8" (110 cm) wide and 30 3/8" (77 cm) long.

From the fleece fabric:

One strip 8" wide and 51 1/4" (130 cm) long for the lower edge.

Two strips 4.5" (11 cm) wide and 28 3/8" (72 cm) long for front edges.

Cut small dots from the black felt fabric.

SEW

At the upper edge of the red plush fabric, turn under and press 3/8" (1 cm) then turn under and press 2" (5 cm), pin in place. Snap on the Edge Stitching Foot. Thread your sewing machine with red sewing thread on top and in the bobbin. Straight stitch along the bottom of the folded part. Snap on presser foot A and stitch 1" (2.5 cm) up from the previous stitch to create a casing. Illustration A.




Illustration A.

Insert the elastic in the casing using the safety pin. Stitch at each end to keep the elastic in place.

Rethread with white sewing thread on top and in the bobbin. Set your sewing machine for heavy woven on your Sewing Advisor or adjust the stitch length to 3.0. Fold one of the fleece strips for front edges in half lengthwise, right sides together. Sew the short end using 3/8" (1 cm) seam allowance. Trim the corner and turn the right side out.

Illustration B.




Illustration B.

Place the fleece edge right sides together with the front side of the cape, raw edges aligned and pin. Snap on presser foot B and select an overlock seam (Designer I: A18) or use your Huskylock. Stitch the edges together using 3/8" (1 cm) seam allowance. Trim excess fabric close to the stitches. Repeat for the opposite front side.

Illustration C.

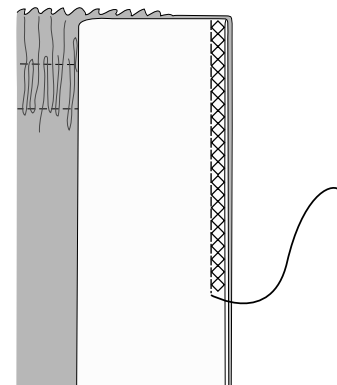


Illustration C.

Snap on presser foot A. Fold the fleece for the lower part of the cape in half lengthwise right sides together. Sew the short ends using 3/8" (1 cm) seam allowance. Trim the corners and turn right side out. Place the fleece right sides together with the lower edge of the cape, raw edges aligned and pin. Snap on presser foot B and select an overlock seam (Designer I: A18) or use your Huskylock. Stitch the edges together using 3/8" (1 cm) seam allowance. Trim excess fabric close to the stitches.

Rethread with black sewing thread on top and select a three step zigzag stitch. Sew the black felt dots here and there on the white border of the cape.

Attach the buckle closure at the upper edge on each side of the fronts.



 **Husqvarna**

VIKING