

## Envelope Cushion



### **Sewing Supplies**

- Husqvarna Viking Designer I
- 1/2 yd (45 cm) dark red velvet
- 1/2 yd (45 cm) dark red chiffon
- 4" (10 cm) orange raw silk for piping and button
- 6 3/8" x 6 3/8" (40 x 40 cm) cushion pad
- 1 button (or button kit)
- Sewing thread
- Sulky 40 wt. Embroidery thread in the same shade as the chiffon
- Water soluble stabilizer
- 1 1/2 yd (1.30 m) narrow cord
- Embroidery disk 46, Candlewicking by Karen McAuliffe

### *Optional accessories:*

- Piping Foot (411 85 10-45)

### **CUT**

In velvet: 2 pieces 16 5/8" x 16 5/8" (42 x 42 cm)

In chiffon: 4 pieces 16 5/8" x 16 5/8" (42 x 42 cm)

In raw silk: 4 strips for piping, 1" (2.5 cm) x 16 5/8" (42 cm).

### **EMBROIDER**

Select design 24. Mark a cross from corner to corner on one of the chiffon pieces. Mark out the center point for the embroideries 6" (15 cm) from center of the pieces. Hoop chiffon with wash away stabilizer in a 100 x 100 hoop and embroider the designs. Remove the stabilizer. Illustration A.

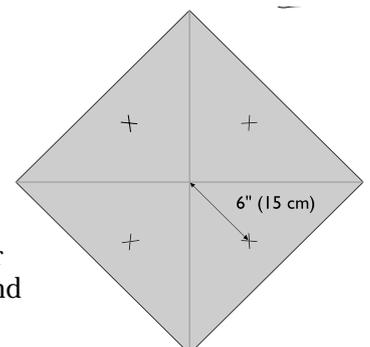


Illustration A.

Cut the piece on the marked lines into four triangles. Cut the unembroidered piece in the same way. Illustration B.

Thread with sewing thread on top and in the bobbin. Select woven light on your Sewing Advisor. Snap on presser foot A. Select a narrow zig zag. Place an embroidered with a plain piece right sides together. Stitch two sides with 1/8" (3 mm) seam allowance. Repeat for four triangles.

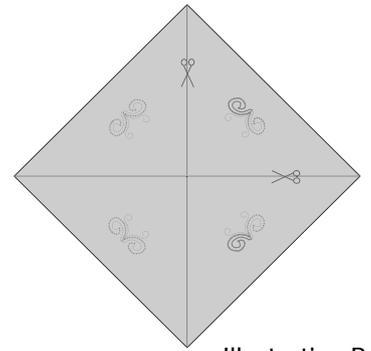


Illustration B.

Turn right sides out. Press. Illustration C.

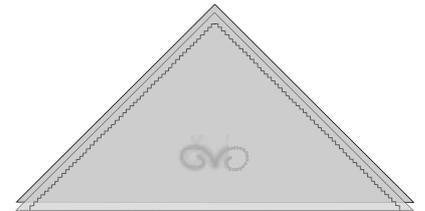


Illustration C.

Snap on the Piping Foot. Fold the raw silk strips around the cord. Select woven medium and seam on the Sewing Advisor. Place fabric and cord under the foot with the cord in the groove under the foot. Sew to cover the cord.

Place a velvet piece right side up with the chiffon triangles on top, right side up. Place piping on two opposite sides. Pin and sew. Stitch piping to the remaining sides. Illustration D.

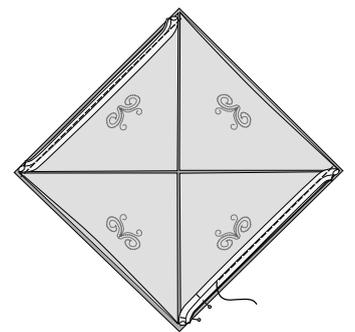


Illustration D.

Place the back side velvet piece right sides together with the front side. Still using the Piping Foot, stitch all around the sides leaving 8" (20 cm) open for turning.

Turn the cushion right side out.

Slipstitch the opening closed.

Follow the button kit instruction to attach the fabric on the buttons or wrap a small piece of raw silk fabric around a large button and handstitch on the back.

Stitch the button centered on the cushion to fasten the corners of the triangles, through the cushion. Illustration E.




Illustration E.



 **Husqvarna**

**VIKING**