

Floor Cushion/Pillow



We made this floor cushion/pillow of linen fabric in matching colors.

Finished size: 28" x 28" (70 x 70 cm)

Sewing Supplies

29" x 29" (73 x 73 cm) beige linen fabric

16" x 16" (40 x 40 cm) cerise linen fabric for large circle appliqué

10" x 10" (26 x 26 cm) wine colored linen fabric for middle circle appliqué

6.5" x 6.5" (16 x 16 cm) white fake fur for small circle appliqué

1 cushion pad (pillow form), 28" x 28" (70 x 70 cm)

Paper backed fusible web (Steam a Seam 2) (Vliesofix)

Sewing thread

3 colors of Sulky Rayon Embroidery Thread 30 wt. in matching color to the appliqué.

Optional Accessory:

Open Toe Foot (412 27 70-45)

Seam allowance included with 5/8" (1.5 cm) in the measurements for the cushion/pillow sides.

CUT

2 squares 29" x 29" (73 x 73 cm) in linen fabric for front- and backpiece.

1 large circle appliqué, 16" (40 cm) in diameter

1 middle circle appliqué, 10" (26 cm) in diameter




1 small circle appliqué, 6.5" (16 cm) in diameter

SEW


Snap on presser foot J and overcast all edges of the front and back piece.

Press paper-backed fusible web onto the wrong side of the three circles. Pull off the paper and place the large circle centered on the right side of the front piece, the middle circle on top of the large circle, and the small on top of the middle circle.


Set up your Husqvarna Viking sewing machine for zigzag, stitch width 4.0, stitch length 0.3. Thread it with Sulky thread in matching color to the first circle that you sew. Snap on presser foot B or the Open Toe Foot which is an optional accessory developed for applique sewing. Sew the circles to the front piece with the different Sulky thread colors for variety.

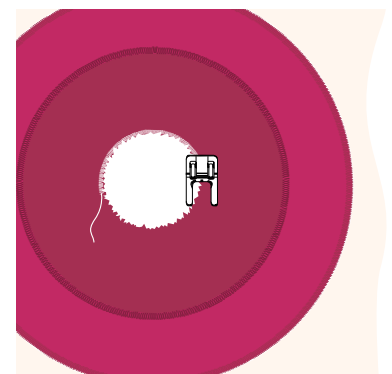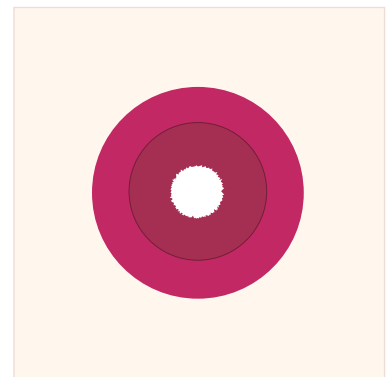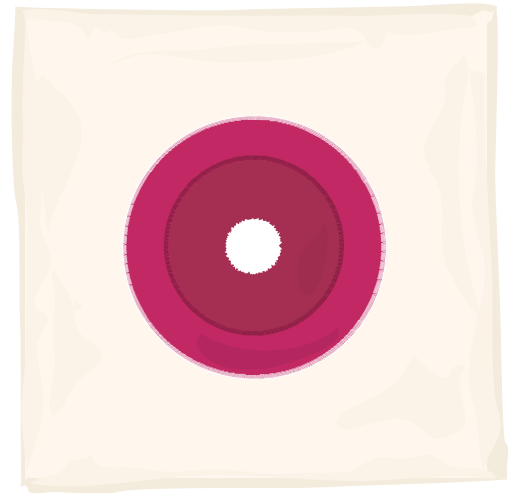

Pin the front and back pieces right sides together. Rethread your Husqvarna Viking sewing machine with sewing thread. Select straight stitch, stitch length 2.5. Change to presser foot A. Sew three open sides together with 5/8" (1.5 cm) seam allowance. Leave the fourth side open.

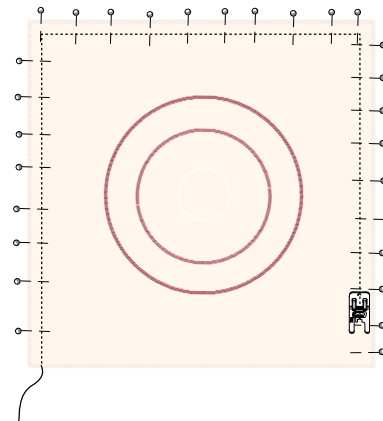

Turn the Cushion/Pillow through the opening, put the cushion pad (pillow form) in the cover. Fold the seam allowance to the inside and pin closed. Snap on presser foot D and adjust the needle to the left. Topstitch the opening closed.

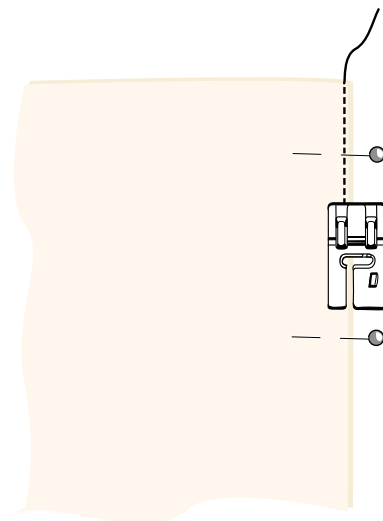

Husqvarna

VIKING