


Create a beautiful bed runner quilt for the foot end of your bed. In this project you will use your HUSQVARNA VIKING® H | CLASS™ E20 for the Log Cabin Block technique, which is a favorite traditional quilt pattern that is easy and fast to sew.

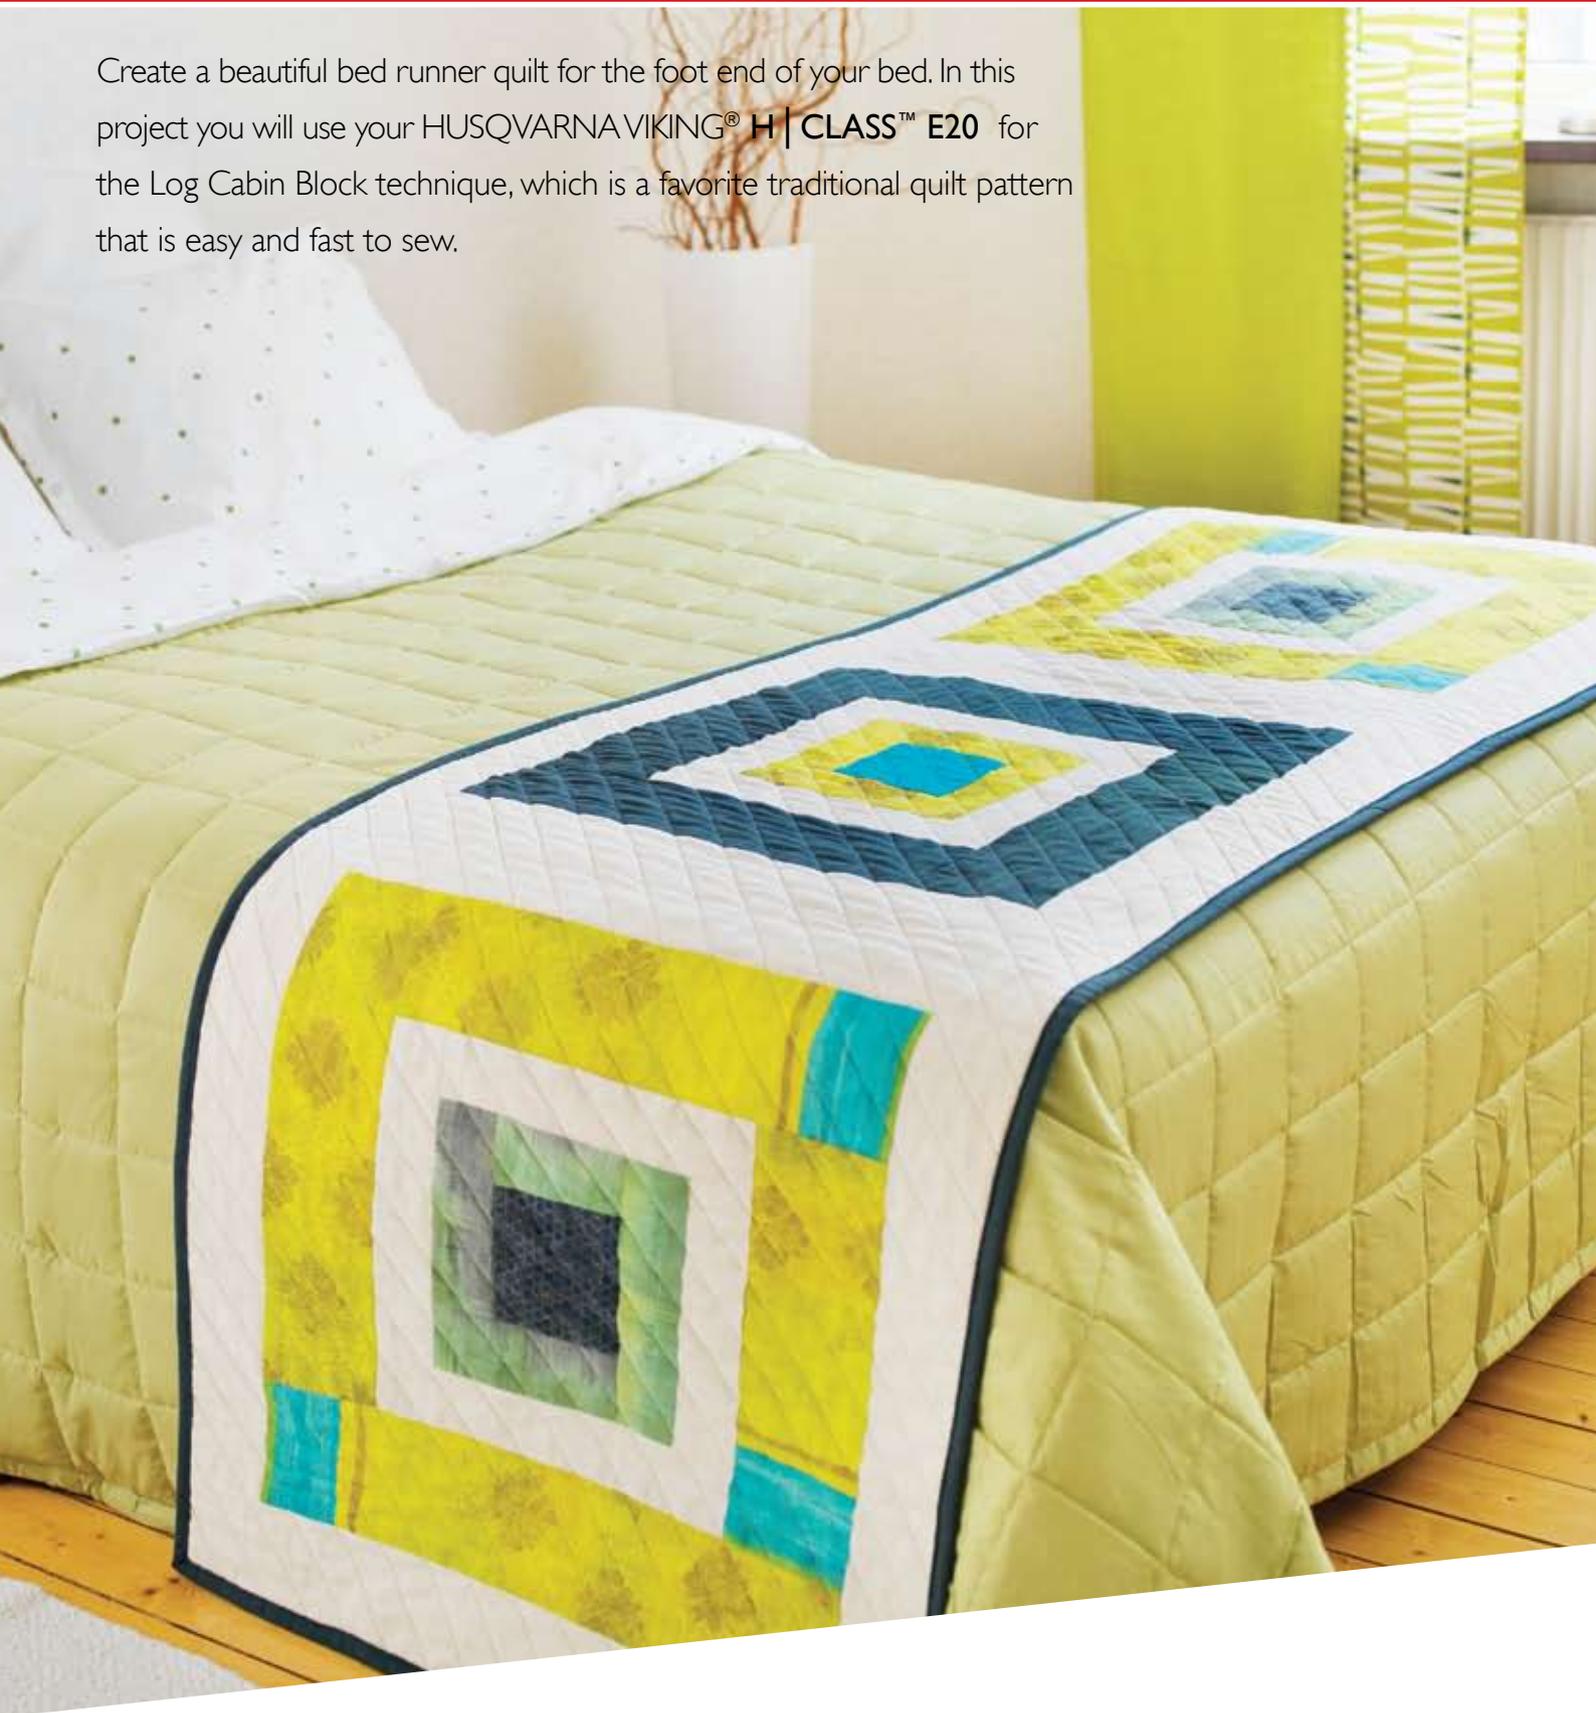

Quilt

Approximate size: 102" x 27 1/2" (260 cm x 70 cm)

SEWING SUPPLIES

HUSQVARNA VIKING® H | CLASS™ E20

Cotton quilt fabrics, 44"/45" (110/114 cm) wide:

Fabric A. Dark green print	4,5" (11,5 cm)
Fabric B. Light green	1/4 yard (15 cm)
Fabric C. Beige	1 3/4 yards (1,5 meter)
Fabric D. Medium green	3/4 yard (65 cm)
Fabric E. Turquoise	1/4 yard (11,5 cm)
Fabric F. Dark green	1 1/4 yards (1 meter)
Beige fabric for backing	2 1/2 yards (2,10 cm)
Batting	55" x 55" (1,40 x 1,40 cm)

Matching sewing thread

ACCESSORIES

HUSQVARNA VIKING® Ruler (412 66 17-01)

HUSQVARNA VIKING® Pictogram Pen™ (412 08 38-48)

Olfa Ergonomic® Rotary Cutter (415 16 42-01)

INSPIRA® Quilting Needles (620 07 26-96)

Safety Pins

CUT

Wash and press all fabrics before you cut and sew. 1/4" (6 mm) seam allowance included in all measurements.

For blocks 1 and 3, cut the following pieces:

Fabric A.

Two center squares 4 1/2" x 4 1/2" (11,5 x 11,5 cm) for log 1.

Fabric B.

Two 2 1/2" (6,5 cm) wide strips for logs 2, 3, 4, and 5.

Fabric C.

Two 2 1/2" (6,5 cm) wide strips for logs 6, 7, 8, and 9.

Six 3 3/4" (9,5 cm) wide strips for logs 14, 15, 16, and 17.

Fabric D.

Four 4 3/8" (11 cm) wide strips for logs 10, 11, 12, and 13.

For blocks 2 and 4, cut the following pieces:

Fabric E.

Two center squares 4 1/2" x 4,5" (11,5 x 11,5 cm) for log 1.

Fabric D.

Two 2 1/2" (6,5 cm) wide strips for logs 2, 3, 4, and 5.

Fabric C.

Two 2 1/2" (6,5 cm) wide strips for logs 6, 7, 8, and 9.

Six 3 3/4" (9,5 cm) wide strips for logs 14, 15, 16, and 17.

Fabric F.

Four 4 3/8" (11 cm) wide strips for logs 10, 11, 12, and 13.

From fabric F, cut six strips 3 1/4" (8 cm) wide for binding for a total length of 264" (660 cm).


Cut the backing fabric in three equally sized pieces 27 1/2" x 44"/45" (70 x 110 cm.).

Cut the batting in two parts 27 1/2" x 55" (70 x 140 cm).

SEW

Log Cabin blocks

1. Thread with a light color sewing thread on top and in the bobbin that will not show through the lightest fabric in the quilt. Snap on the All Purpose foot.
2. Create each block using the Log Cabin Quilt technique. The pattern begins from the center square and strips or "logs" are stitched, right sides together around the

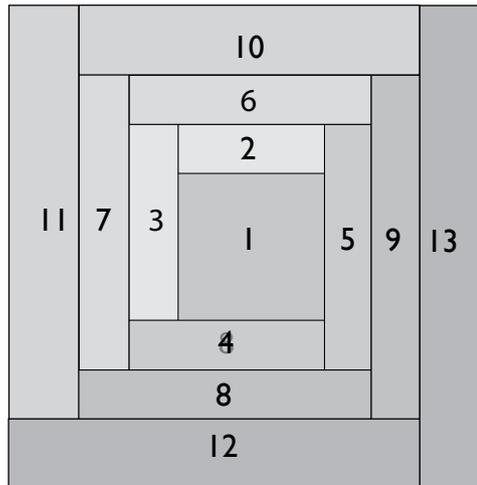

center square counter-clock wise. Hint: Remember to always sew the next strip on the side with the seam from the previous strip.

3. With right sides together and raw edges aligned, place center square on top of the first fabric strip for log 2. Stitch the center square to the strip, right sides together. Unfold and press seam allowance towards the center square. Repeat for all four center squares.


- Using your rotary cutter and ruler, align ruler with the raw edge of the square and cut strips even with the edges of the center square. Repeat for all four squares.
- Place the two-square unit on top of the fabric strip for log 3 right sides together. Sew. Align ruler with raw edge of the unit and cut to form a three-piece unit. Repeat for all four blocks. Always press seam allowance towards the center of the block. Continue sewing logs in this way until you have used all strips.
- Join the blocks, right sides together, to one horizontal row with 4 blocks.

QUILT YOUR QUILT

- Join the three backing pieces to create a 27 1/2" x 132"/135" (70 x 330 cm) long piece. Cut down to 27 1/2" x 110" (70 x 280 cm).
- Join the batting to create a 27 1/2" x 110" (70 x 280 cm) long strip.
- Sandwich the quilt. Place the backing on a flat surface, right side down. Center the batting on top of the backing. Center the quilt top right side up on top of the batting. Baste with safety pins approximately every 4" (10 cm) all over the quilt. Make sure that all layers are flat. Start from the center and work your way out to the edge.
- Using your Pictogram Pen mark a straight line diagonally on the first block. Make sure that the line crosses the center square precisely. Attach the All Purpose Foot and start topstitching your quilt following the marked line.
- Slide on the Seam Guide. Set the distance between the center of the needle and the Seam Guide to 1 1/4" (3 cm). Topstitch the entire quilt.
- Remove the safety pins. Trim all raw edges even.

BINDING

- Place the ends of the binding strips right sides together across each other as shown and join them together. Trim excess fabric and press seam allowance open.
- Pin the binding in place on the back of the quilt, right side together, edges aligned. Sew in place with a straight stitch.

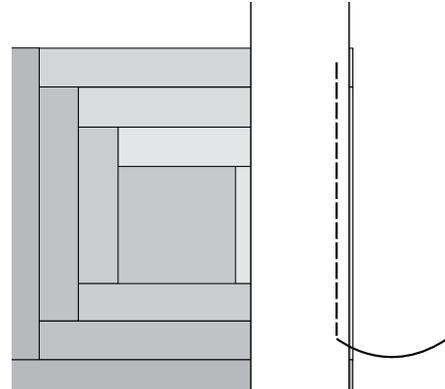

- Turn the binding over to the right side and pin in place. Tuck excess fabric at the corners into a miter. Sew the binding in place with a straight stitch.

