



SEWING
INSTRUCTIONS

Sapphire™

Free-Motion Pebbling Pillow

APPROXIMATE SIZE

19¾" x 19¾" (50x50 cm)

SEWING SUPPLIES

8 assorted cotton fabrics

Cord for piping - thickness ¼" (6 mm)

Thread – 2 different colors

Invisible Zipper 20" (50 cm)

Batting

HUSQVARNA VIKING® ACCESSORIES

Clear Invisible Zipper Foot 413286545

Clear ¼" Piecing Foot with Guide
412927445

Clear ¼" Piecing Foot 412927447

Free-Motion Echo Quilting Foot 413320245

Mega Piping foot 413195145

CUT

1 piece of batting 19¾" x 19¾" (50x50 cm)

25 squares 4½" x 4½" x (11.5x11.5 cm) in different fabrics

1 back piece 16½" x 20½" (42x52 cm)

1 back piece 4¾" x 20½" (12x52 cm)

1 strip, for the piping, in cotton fabric cut on the bias or crosswise grain –
82¾" x 1⅛" (210x4.5 cm)

SEW THE SQUARES TOGETHER

Place the 25 squares in a pattern you like, sew them together using a ¼" (6mm) seam allowance. Sew five rows with five squares in each row. Sew the rows together creating a quadrate. Press all seam allowances open.

QUILTING

Pin the quadrate to the batting and start quilting. Decorate your quilt as you like, only your imagination sets the limits.

We chose different techniques for quilting. Free-motion quilting, handlook quilting and straight stitches were combined to create an exciting look. Free-motion quilting not only keeps the top, batting and backing together, but it also adds texture and interest to your quilt.

Straight Stitch Quilting

Snap on the Clear ¼" Piecing Foot. Use different patterns of straight stitching to quilt some of the squares.

"Handlook" Quilting


To give a hand made look to your quilting, use the Handlook Quilting Stitch (D:2 (model 960Q)/2:11(model 930).

This stitch is pre-set with a higher thread tension value to intentionally pull up the bobbin thread and produce the desired "handlook" effect.

Thread the top thread with transparent thread and the bobbin thread with a contrasting or matching thread.

Sew around the squares about ¼" (6 mm) from the edge.

Note: When sewing with the handlook quilting stitch, the result depends on what fabric, batting and thread you are using. Be sure to try the stitch on a sample first. Adjust the thread tension as needed for your project.

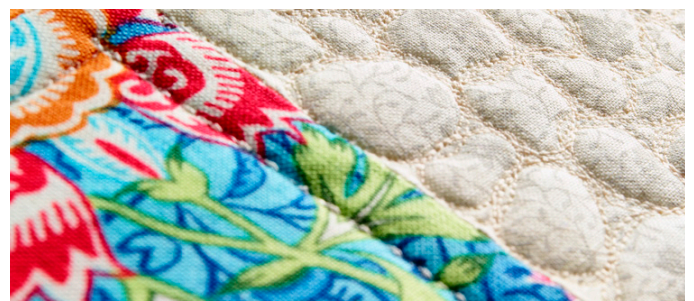

The Handlook Quilting Stitch adds a hand look appearance to your project


Free-Motion Pebbling

Set your machine in Free-Motion Floating mode (on model 930 you also need to lower the feed teeth) and snap on the Free-Motion Echo Quilting Foot. Select straight stitch.

The pebbling free-motion filler technique is an intense amount of traveling to move from one “pebble” to another. Here you can cross your own stitch lines, opposite to the Stippling technique (Ill. 1).

Hint: You can speed up the process of stitching each circle by creating larger circles and surround them with medium sized pebbles. When stitching multiple sizes and shapes it won't take so much time to cover your quilting space with this texture.

Tip! Practice free motion sewing on scraps of the fabric and batting from your quilt. It is important to move your hands at the same speed as the needle to prevent stitches that are too long or too short. Maintaining a consistent speed while free-motion sewing will also help keep stitches even.

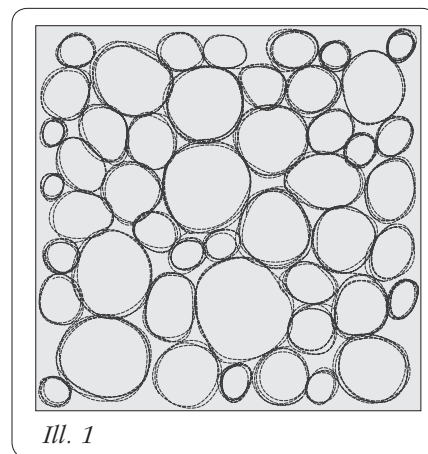

ASSEMBLE THE PILLOW

Re-set the free motion mode and raise the feed teeth (model 930).

Back Piece

The back of the pillow consists of two pieces of fabric stitched together with a zipper as an opening.

Either insert a standard zipper using the Zipper Foot E or use the optional Clear Invisible Zipper Foot to insert an invisible zipper.

Make the Piping

To add an exclusive finish to your pillow, make your own piping using the fabric you want and the Mega Piping Foot.

Take your piping fabric strip, and place it wrong side up. Put the cording on top and wrap the fabric around it.

Snap on the Mega Piping Foot to the right side of the needle. Place the fabric and the cord under the Mega Piping Foot with the cord to the left of the foot. Select Straight Stitch and adjust the stitch position to -2.0. Sew (Ill. 2).

Insert the Piping

Place the front piece of the pillow right side up. Place the piping along the seam line on the right side of the fabric (Ill. 3). Adjust the stitch position to -2.5 and stitch in place with the piping to the left of the foot.

Tip: When sewing the piping into a project, adjust the stitch position so the seam is stitched even closer to the cord to cover the first stitching.

Place the back piece on top, right sides together with the front piece. Select straight stitch with left needle position. Sew the pieces together with the cord to the left of the Mega Piping Foot (Ill. 4).

Tip: Notch the seam allowance of the piping on corners to reduce bulk and make the seam lay flat.

Turn the pillow inside out and press. Enjoy the result!

Find more information on how to use our accessories at www.husqvarnaviking.com.

