

Cover for Keyboard



Sewing Supplies

- Husqvarna Viking Sewing machine
- 20" (50 cm) red Linen fabric
- Scraps of white linen fabric for appliqué
- Sewing thread
- Sulky 30 wt. Embroidery thread, white.
- Fusible web (Vliesofix)(Steam a Seam 2)
- Husqvarna Viking Tear-A-Way™ stabilizer
- Marking Foot (411 85 03-45)

Optional:

- Open Toe Foot (412 27 70-45)

CUT

Measure the width, height (with keys!) and length of your computer keyboard. Take these measurements and add 3/8" (1 cm) seam allowance on all sides. Cut one piece for the sides in double fabric as illustrated. Cut two top pieces for stability. (illustration 1)




Illustration 1.

Trace the pattern for the hands on next page on the fusible web (or trace your own hands directly) and press the fusible web to the wrong side of the white linen fabric. Cut out the hands. Remove the paper from the sticky surface and adhere the hands in place on the top piece.

SEW

Thread with white embroidery thread on top and sewing thread in the bobbin. With presser foot B or the optional Open Toe Foot, stitch a 4 mm wide satin stitch around the hands. Use tear away stabilizer underneath. (Designer I: F4, Designer II: A1 28). (illustration 2)

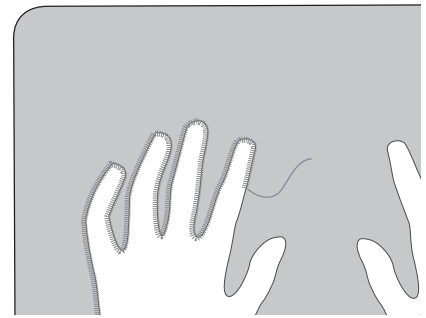


Illustration 2.

Rethread with red sewing thread on top and bobbin. With straight stitch, sew the side seam of the side piece. Press seam allowance flat open. Snap on presser foot J. Fold the side piece double lengthwise and overcast around the raw edges.

Place the top pieces wrong sides together and overcast the edges to one piece.

Rethread with white embroidery thread on top and in the bobbin. Snap on the Marking Foot to stitch fringe around the side piece. Select a satin stitch, (Designer I: F4, Designer II: A1 28). Adjust length to 0.4, width 4.0. Adjust thread tension to 1.4. Stitch 3/8" (1 cm) from the overcast edge of the side piece with tear away stabilizer underneath. Finger press the loops towards the folded edge and stitch along the base of loops with a straight stitch to anchor them. Tear away the stabilizer. (illustration 3)

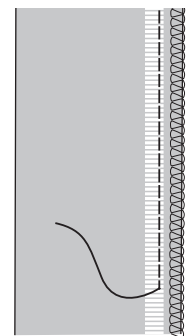


Illustration 3.

Rethread with red sewing thread. Pin the side piece to the double top piece, right sides together. With presser foot A and the side piece up, stitch the side piece to the top piece just above the satin stitch. Cut in the corner seam allowance of the top piece. Turn and press.

Cut up the satin stitch to a fringe.

